

(12) **United States Patent**  
**Carcone**

(10) **Patent No.:** **US 8,022,857 B2**  
(45) **Date of Patent:** **\*Sep. 20, 2011**

(54) **RADAR REFLECTOR**

(75) Inventor: **John M. Carcone**, Portsmouth, RI (US)

(73) Assignee: **Raytheon Company**, Waltham, MA (US)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

4,890,568 A	1/1990	Dolengowski	
4,901,081 A	2/1990	Bain, Jr. et al.	
5,061,929 A	10/1991	Bell	
5,164,129 A *	11/1992	Douglas	264/415
5,257,954 A	11/1993	Mullisen et al.	
5,311,706 A *	5/1994	Sallee	52/2.18
5,421,287 A *	6/1995	Yonover	116/209
5,530,445 A	6/1996	Veazy	
5,736,954 A *	4/1998	Veazey	342/8
5,838,275 A	11/1998	Carmi	
5,906,199 A	5/1999	Budzinski	
6,082,472 A *	7/2000	Verstraeten	175/323

(Continued)

(21) Appl. No.: **12/700,285**

(22) Filed: **Feb. 4, 2010**

(65) **Prior Publication Data**

US 2011/0025544 A1 Feb. 3, 2011

**Related U.S. Application Data**

(62) Division of application No. 11/601,938, filed on Nov. 20, 2006, now Pat. No. 7,671,783.

(51) **Int. Cl.**  
**H01Q 15/00** (2006.01)

(52) **U.S. Cl.** ..... **342/10; 342/5**

(58) **Field of Classification Search** ..... 342/5–12  
See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

2,534,710 A	12/1950	Golian et al.	
3,938,151 A *	2/1976	Trenam	342/10
3,952,694 A	4/1976	McDonald	
3,959,766 A	5/1976	Nees et al.	
4,152,933 A	5/1979	Woodhouse	
4,215,862 A	8/1980	Yoshikawa et al.	
4,226,910 A *	10/1980	Dahlen et al.	428/336
4,475,476 A	10/1984	Howard	

**OTHER PUBLICATIONS**

Office Action Restriction Requirement dated Aug. 4, 2008 from U.S. Appl. No. 11/601,938, 8 pages.

(Continued)

*Primary Examiner* — Thomas H Tarcza


*Assistant Examiner* — Timothy A Brainard

(74) *Attorney, Agent, or Firm* — Daly, Crowley, Mofford & Durkee, LLP

(57) **ABSTRACT**

A submarine warfare radar training system **10** includes an underwater vehicle **15** towing a float device **40** and a radar reflective target **45**. The radar reflective target **45** is configured as a hollow tube-shaped element **50** having circular open leading and trailing open circular end to allow water to flow through the target as it is towed. The target **45** includes a positive buoyancy material layer **60** and is horizontally oriented during towing. The float device **40** is configured to support the radar reflective target **45** open leading end above the water surface **30** as the float device **40** and radar reflective target **45** are towed along the water surface to deliver air into the hollow cross-section. The radar reflective target **45** has an adjustable RCS which can be increased or decreased by lengthening or shortening the radar reflective target.

**31 Claims, 8 Drawing Sheets**

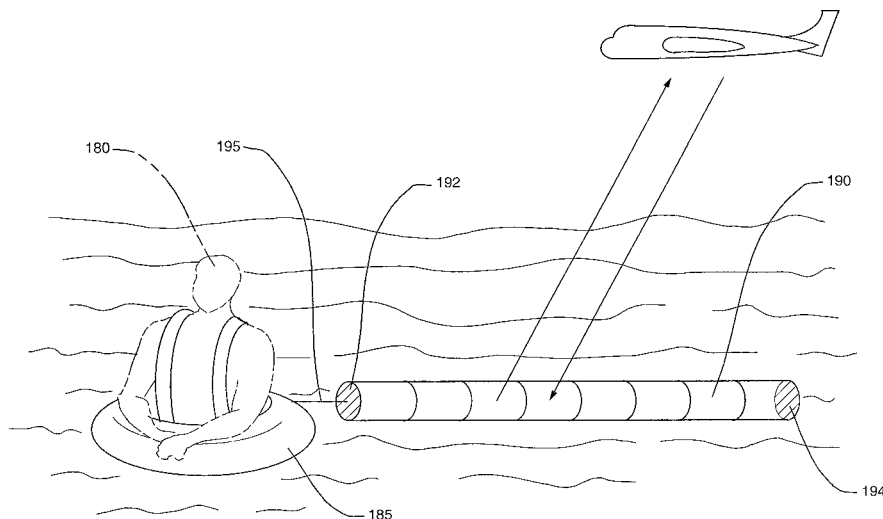

U.S. PATENT DOCUMENTS

6,225,940	B1	5/2001	Ohlsen	
6,384,764	B1	5/2002	Cumberland	
6,496,447	B1	12/2002	Gabriel	
6,570,545	B1	5/2003	Snow et al.	
6,784,825	B1	8/2004	Kubota et al.	
6,845,728	B1 *	1/2005	Horton	114/244
6,864,858	B1 *	3/2005	Miller et al.	343/915
7,671,783	B2 *	3/2010	Carcone	342/9
2003/0221736	A1 *	12/2003	Laurent et al.	138/123
2004/0111852	A1 *	6/2004	Baiker	29/90.7
2005/0269064	A1 *	12/2005	Hsu	165/104.26
2007/0008712	A1	1/2007	Schnitzer	
2008/0070457	A1	3/2008	Yonover et al.	

OTHER PUBLICATIONS

Response to Office Action Restriction Requirement dated Aug. 26, 2008 from U.S. Appl. No. 11/601,938 3 pages.

Office Action dated Oct. 21, 2008 from U.S. Appl. No. 11/601,938, 12 pages.

Response to Office Action dated Oct. 21, 2008 as filed on Jan. 19, 2009, 12 pages.

Office Action dated Apr. 24, 2009 from U.S. Appl. No. 11/601,938, 10 pages.

Response to Office Action dated Apr. 24, 2009 as filed on Jun. 17, 2009, 11 pages.

Office Action dated Aug. 4, 2009 from U.S. Appl. No. 11/601,938, 7 pages.

Response to Office Action dated Aug. 4, 2009 as filed on Nov. 24, 2009, 6 pages.

Notice of Allowance and Fees Due for U.S. Appl. No. 11/601,938 dated Dec. 18, 2009, 7 pages.

Zodiac Hurricane Technologies, Inc., Professional Division "H630 Fast Rescue Boat", Mar. 2004, 3 pages. Zodiac Hurricane Technologies, Inc., 7830 Vantage Way, Delta, British Columbia, Canada V4G 1A7. [www.zodiac.com](http://www.zodiac.com).

\* cited by examiner

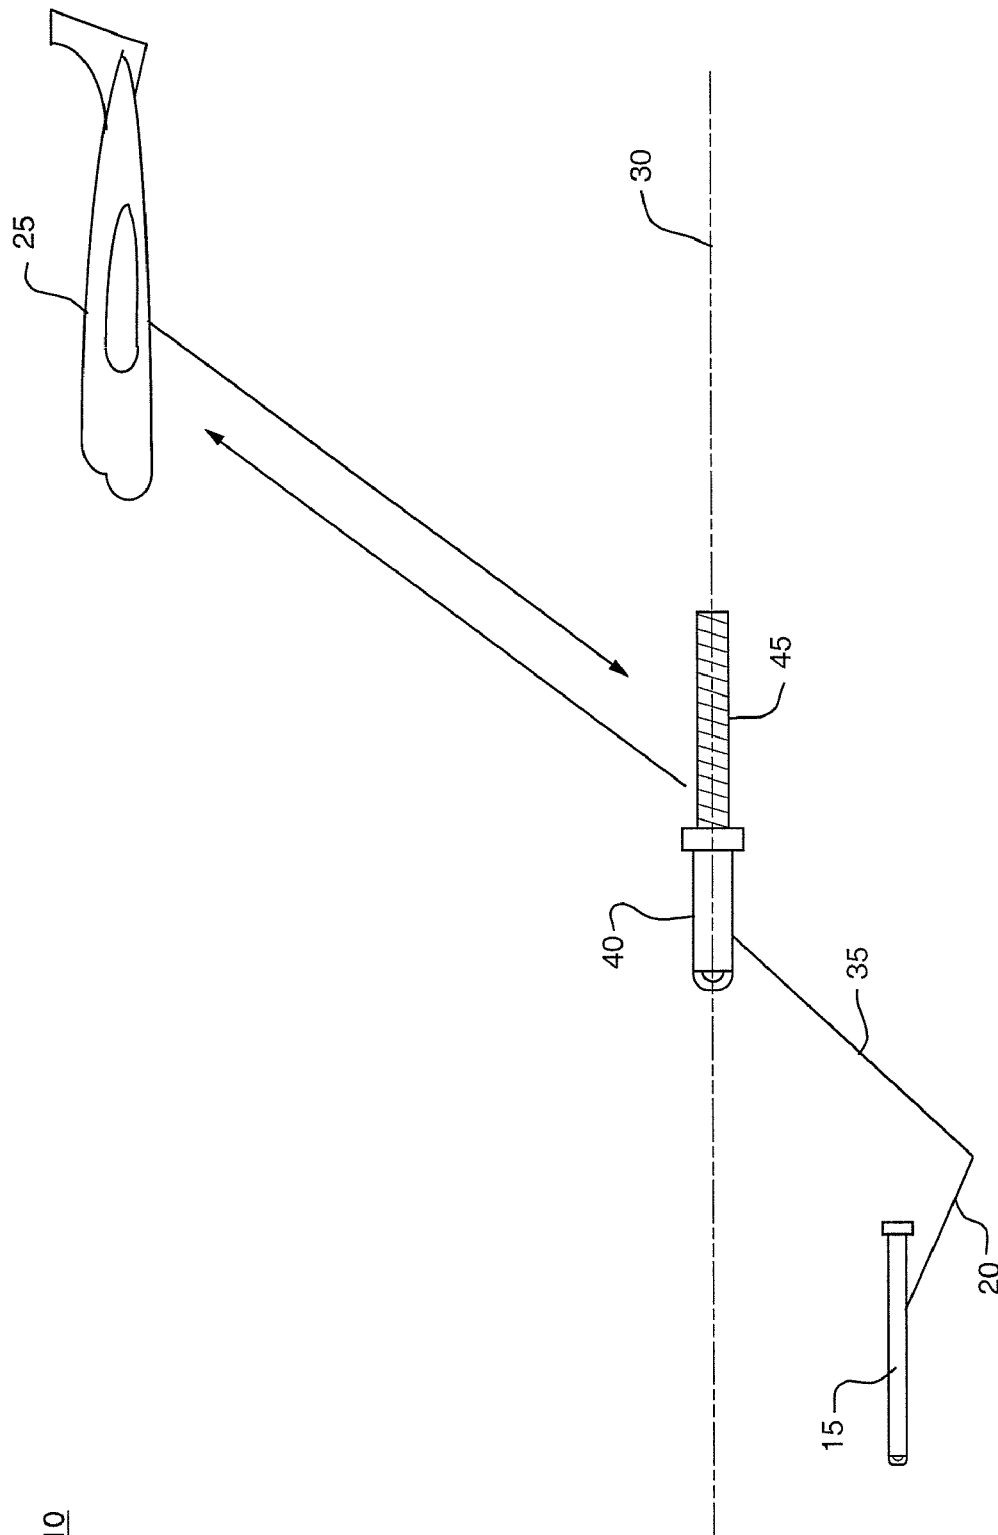


FIG. 1

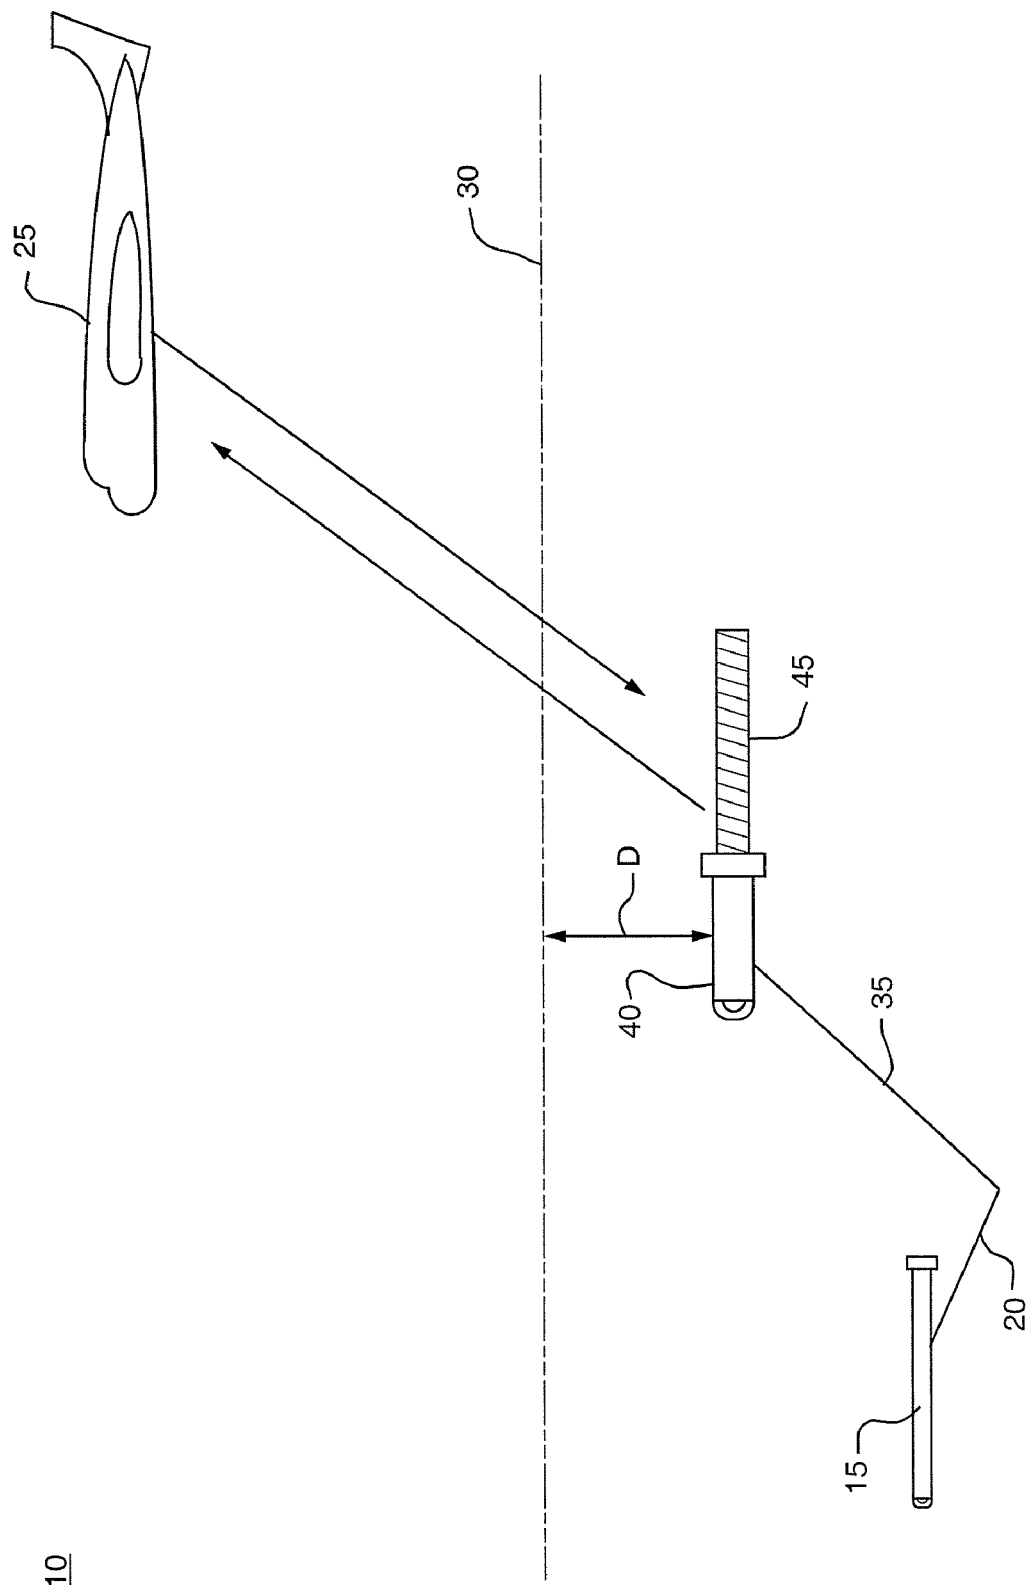
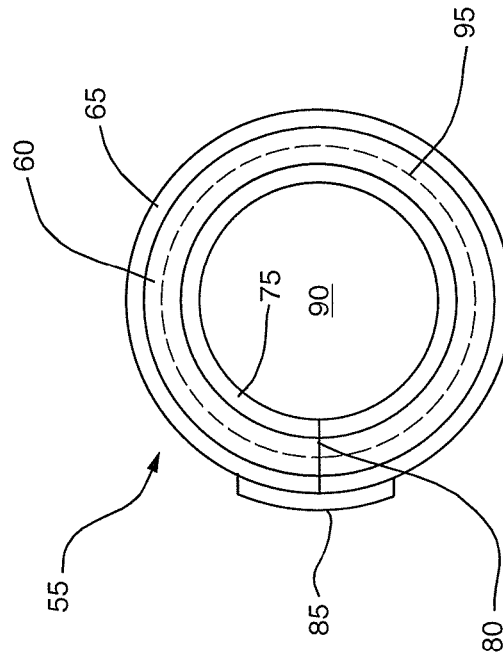
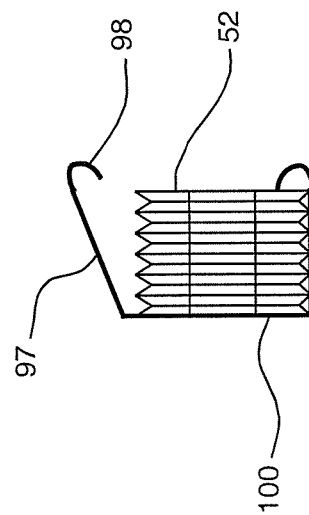
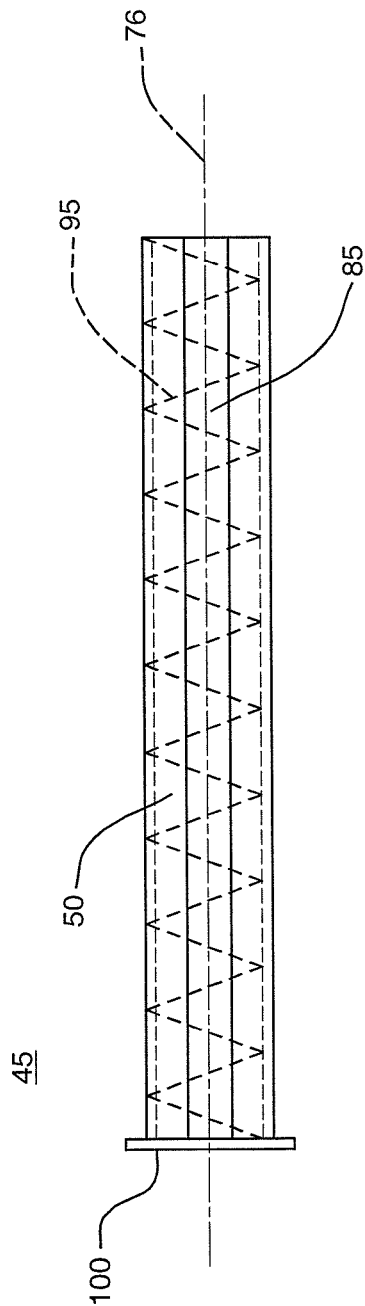


FIG. 2



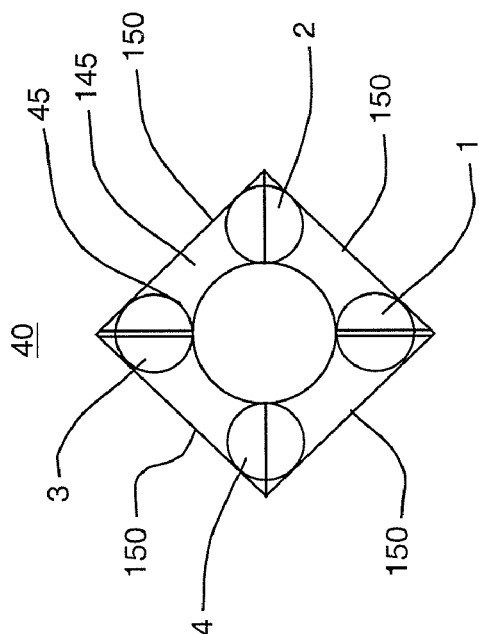


FIG. 4B

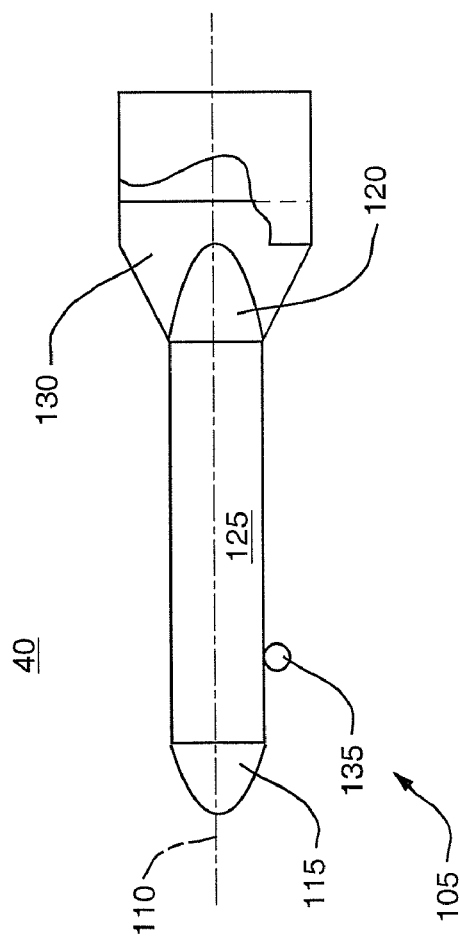


FIG. 4A

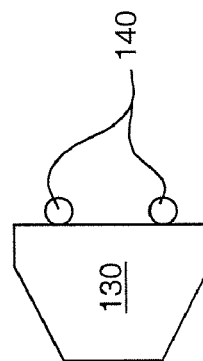


FIG. 4C

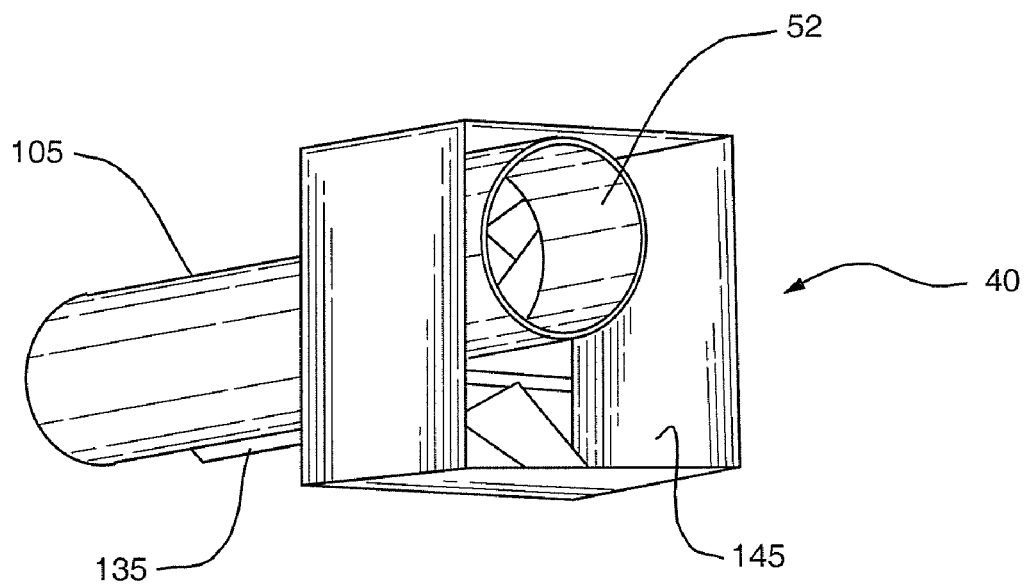


FIG. 5

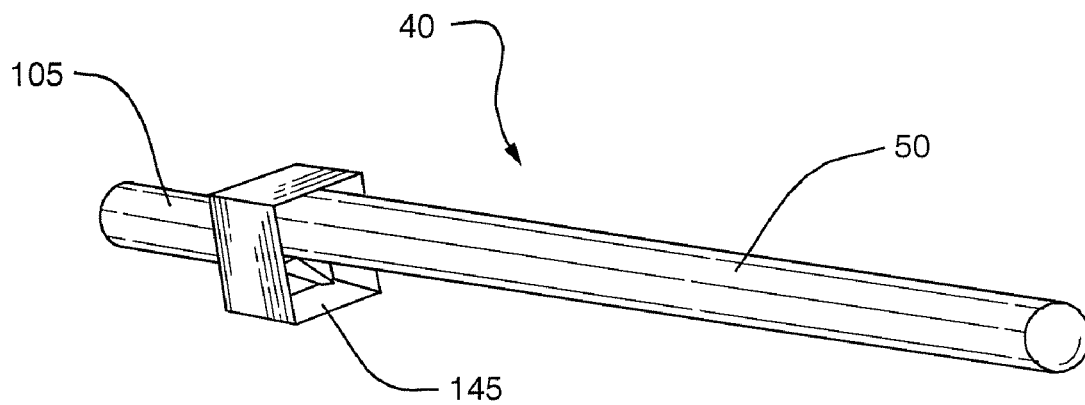


FIG. 6

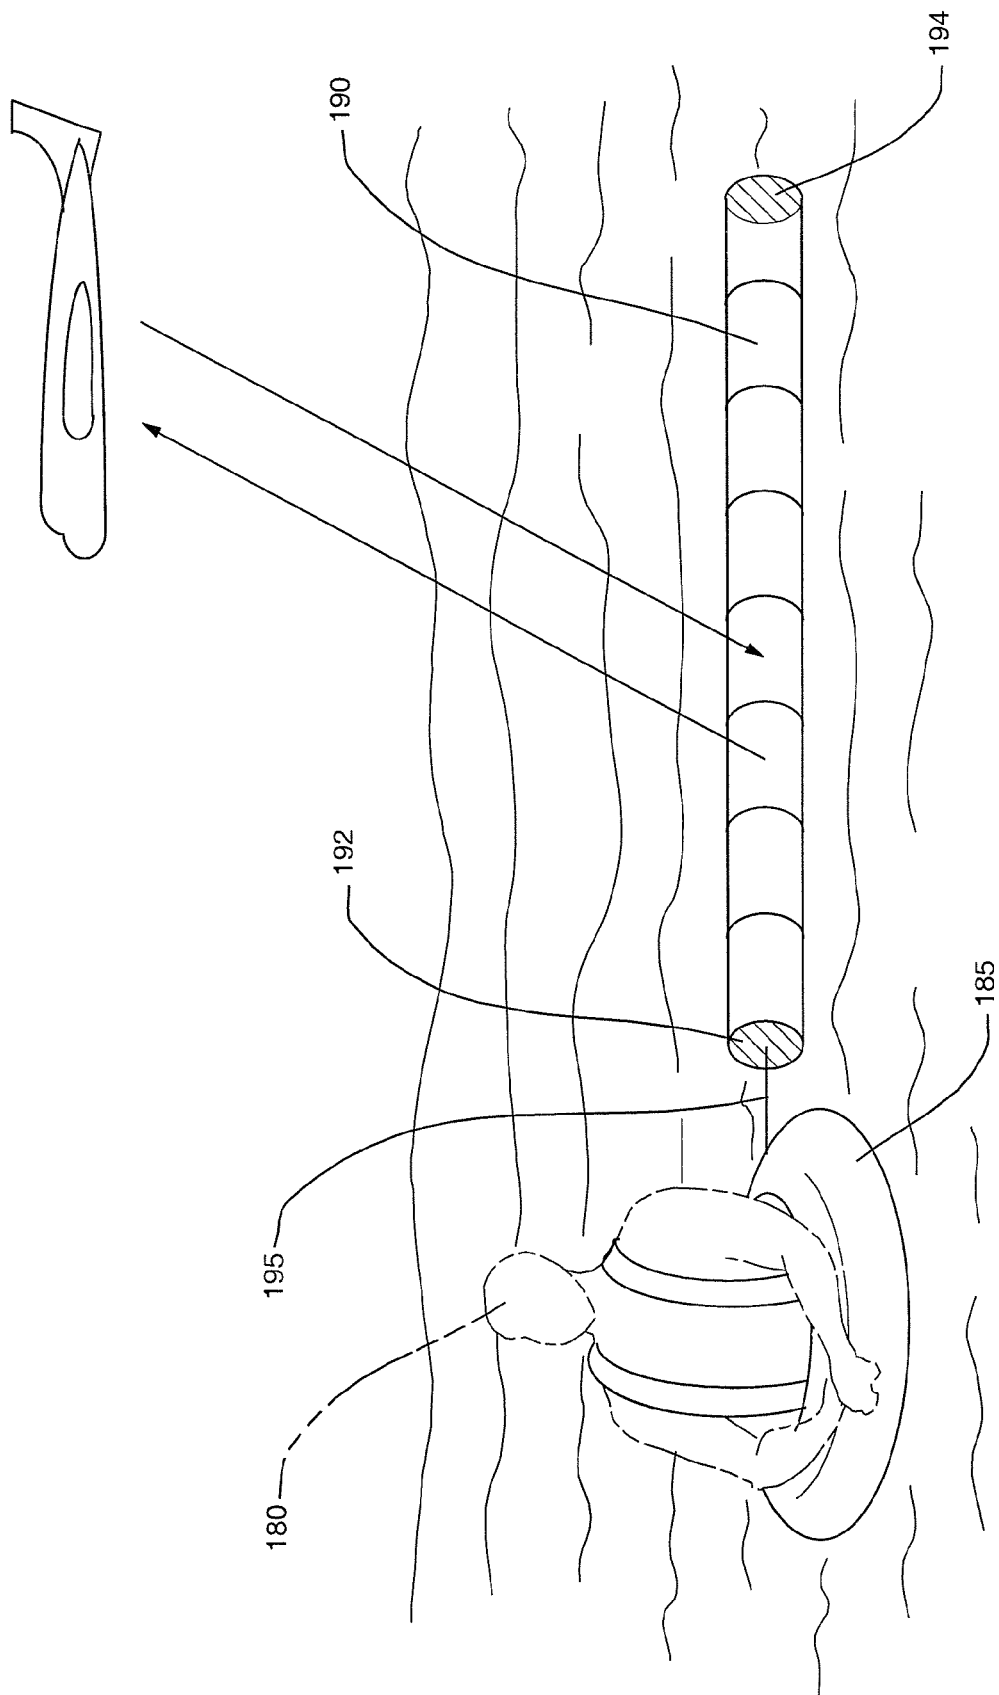


FIG. 7



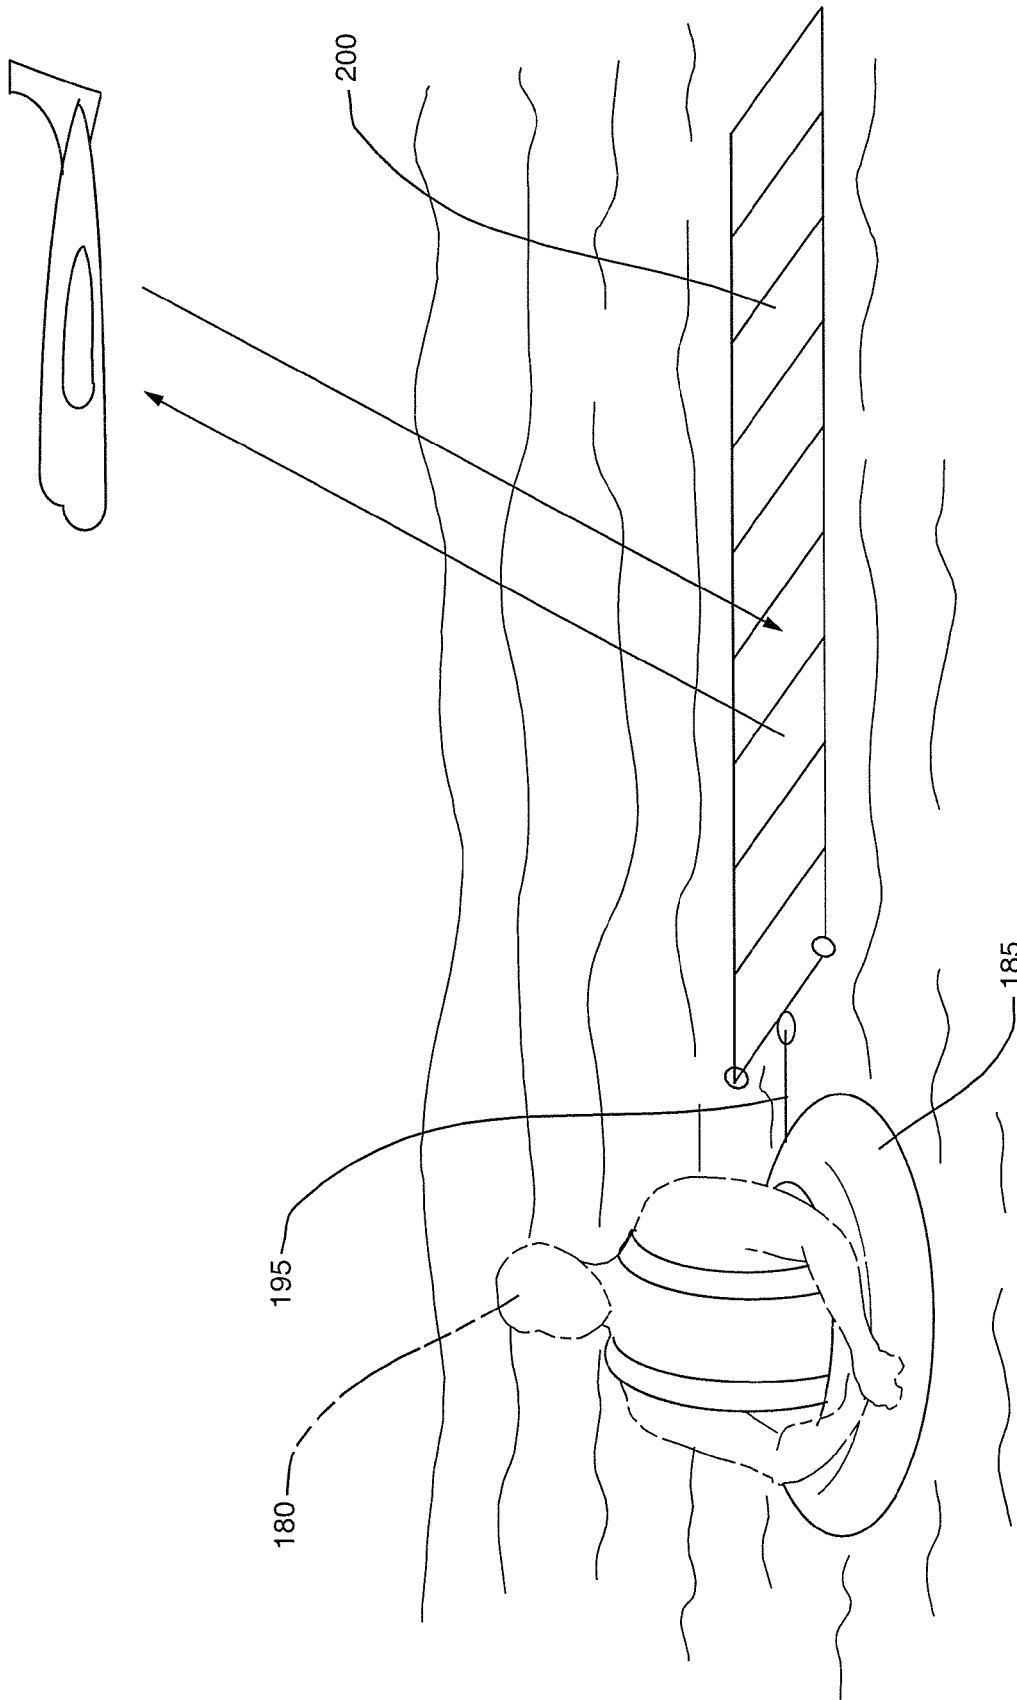


FIG. 8

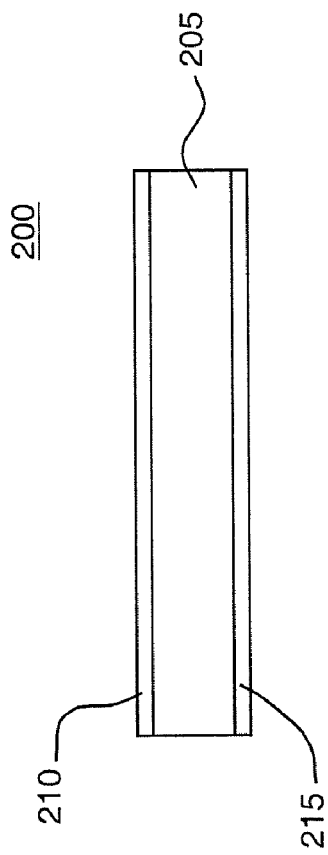


FIG. 9A




FIG. 9D

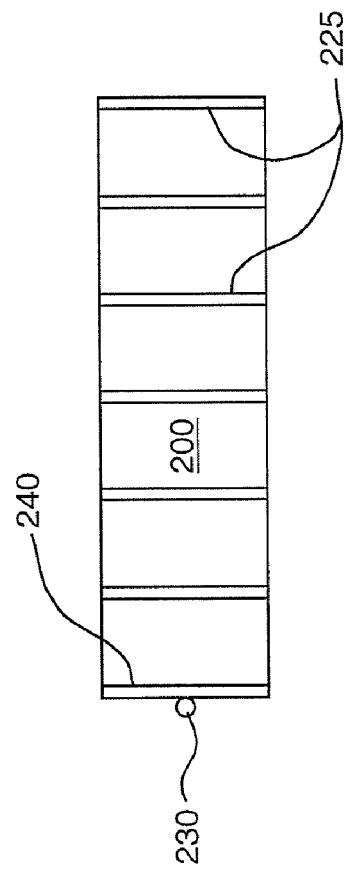


FIG. 9B

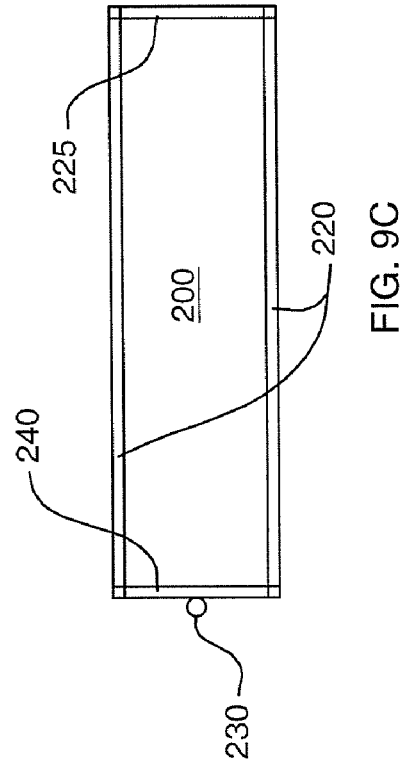


FIG. 9C

1

**RADAR REFLECTOR****CROSS REFERENCE TO RELATED APPLICATIONS**

This application is a divisional of U.S. patent application Ser. No. 11/601,938 entitled "RADAR REFLECTOR," filed on Nov. 20, 2006, which is incorporated herein by reference.

**STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH**

This invention was made with government support under Contract No. N00024-96-C-6106 awarded by the Department of the Navy. The government has certain rights in the invention.

**BACKGROUND OF THE INVENTION**

In a submarine warfare training applications it is known to deploy a device in the water to simulate a submarine periscope mast extended above the water in order to train radar operators to find small radar targets. A submarine mast simulator is shown by Horton in U.S. Pat. No. 6,845,728, entitled TOWABLE SUBMARINE MAST SIMULATOR. Horton describes a tow body formed by a hydrodynamically shaped hollow shell formed with a nose, a tail and a plurality of stabilizer fins extending radially from the tail. The shell shape and stabilizer fins are configured to minimize drag and to stabilize the orientation of the tow body as it is towed by an unmanned underwater vehicle (UUV). The shell attaches to the UUV underwater vehicle by a tow line or cable to tow the shell at a desired speed, along the water surface, or submerged at a desired depth below the water surface.

Horton's tow body is equipped with a variety of submarine simulating features including a simulated submarine mast that generates a wake in the water and provides a visual and radar profile similar to that of a submarine mast extended above the water. The tow body also includes a combustion chamber that generates simulated infrared and chemical vapor emissions of a submarine. The simulated submarine mast includes a rigid but hollow cylindrical lower portion pivotally attached to the shell. The mast upper portion comprises an inflatable elastomeric tube that is filled by air to deploy the mast visual and radar simulator element vertically extended above the water surface. In a non-operating position the mast upper portion is deflated and coiled and the mast lower portion pivoted to a horizontal orientation for storage inside the shell. However, the submarine mast simulator described by Horton is complex and costly. It includes a mast pivoting motor and gears, an air pump to inflate the elastomeric tube and numerous automated electrical and mechanical control elements to raise and lower the mast as required. Much of the complexity of the Horton device relates to vertically extending the radar target above the water. Meanwhile, there is a need for a simpler lower cost device.

In another example, a target training device is shown by Yoshikawa et al. in U.S. Pat. No. 4,215,862, entitled WATER SURFACE TOWED TARGET. Yoshikawa et al. describe a towed target formed by a torpedo shaped underwater towed member supporting a target pole or mast extending above the water surface. The towed member is towed by a ship and the target pole includes a spherical radar reflector (Lunenburg lens) supported at its top end. In order to stabilize the towing characteristics of the Yoshikawa et al. device and particularly to keep the mast vertically oriented, the towed member is configured with a submerged ballast weight, a plurality of

2

target support and stabilizing members. Again, much of the complexity of the Yoshikawa et al. device relates to vertically extending the radar target above the water.

Applicants have recognized that a radar target disposed substantially horizontally along the water surface can be detected by an airborne radar system and may be used to train airborne radar operators in submarine warfare. This realization allows the use of a simplified and less costly radar target to simulate the radar cross-section of a submarine mast but without the need to support the target vertically extended above the water surface. In addition, there is a need in the art of submarine warfare training to provide a submerged radar target, e.g. being towed at a submerged depth of 100 feet below the water surface and this need is not addressed by in the prior art.

A horizontally disposed radar target is disclosed by Yonover in U.S. Pat. No. 5,421,287 entitled VISUAL LOCATING DEVICE FOR PERSONS LOST AT SEA OR THE LIKE. Yonover discloses a streamer rolled up for storage and attached to a flotation device such as might be worn by a distressed person in water. The streamer is formed of a thin polyethylene material outstretched flat on the water surface. The streamer is coated with one or more materials selected to make the streamer visible from an aircraft. However, even if the streamer of Yonover had radar reflective material, it would not be effective for detection by radar in an airplane because the streamer is essentially flat resting on the water surface with water flowing over it.

**SUMMARY OF THE INVENTION**

The present invention overcomes the problems cited in the prior art by providing a radar target system which includes a radar reflective target formed by a hollow tube-shaped radar reflective element. The tube-shaped element is formed with circular cross-section having an open leading end and an open trailing end. The target includes an attaching element attached to the open leading end of the tube-shaped element and secured to a float device that is configured to be towed along the surface of a body of water or that may be towed submerged under the water.

The float device includes a cylindrical float section comprising a positive buoyancy material. A conical nose portion attaches to the float section at the leading end thereof facing a tow direction. A conical tail portion attaches to the float section at its trailing end. The float device includes a plurality of stabilizer fins attached to the conical tail portion and extending radially outward. The stabilizing fins orient and stabilized the float device as it is being towed.

The float device includes a tow line attaching element for connecting to a tow line. The attaching element is positioned to provide a desired towing performance as the float device and radar reflective target are towed in through the water. The attaching element attached to the tube-shaped element at its leading open end is configured to maintain the circular cross-section of the leading open end as the float device and radar reflective target are towed in water. The float device also includes an attaching member secured at its trailing end for attaching the hollow tube-shaped radar reflective target to the float device.

The float device and attached hollow reflective radar reflective radar target are secured to an underwater vehicle by a tow line. The underwater vehicle, which may be manned or unmanned, tows the float device and attached radar target. The float and target may be towed along the water surface or submerged. Air enters the hollow reflective radar target which assists in providing buoyancy. When the float device is sub-

3

merged, water fills the hollow reflective radar target which assists with the sinking. The system may also include an acoustic array configured to emit an acoustic signature that simulates the sound made by a submarine. The array is disposed between the underwater vehicle and the tow line. The float device may also be configured with a box-shaped hollow storage area attached to its trailing end to extend its longitudinal length. The box may be used to store one or more radar targets with hollow tube-shaped elements in a collapsed state. The float device is also configured to support the hollow tube-shaped radar reflective target open leading end above the water surface as the float device and radar reflective target are towed in water. Generally, the hollow tube-shaped radar reflective target has an adjustable RCS which may be increased or decreased by lengthening or shortening the radar reflective target.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The features of the present invention will best be understood from a detailed description of the invention and a preferred embodiment thereof selected for the purposes of illustration and shown in the accompanying drawings in which:

FIG. 1 illustrates a submarine warfare training target system presenting a tube-shaped radar target on a water body surface according to the present invention.

FIG. 2 illustrates a submarine warfare training target system presenting a tube-shaped radar target submerged under a water body surface according to the present invention.

FIG. 3A illustrates a side view of a hollow tube-shaped radar reflective target according to the present invention.

FIG. 3B illustrates a side view of the hollow tube-shaped radar reflective target in a collapsed state according to the present invention.

FIG. 3C illustrates an expanded end view of a hollow tube-shaped radar reflective target according to the present invention.

FIG. 4 A illustrates a side view of a floatation device including an optional storage box according to the present invention.

FIG. 4B illustrates a rear view of a floatation device including an optional storage box according to one embodiment of the present invention.

FIG. 4C illustrates a side view a floatation device stabilizer fin according to the present invention.

FIG. 5 illustrates an isometric rear view of a floatation device configured with an optional storage box having a collapsed hollow tube-shaped radar reflector stored inside according to the present invention.

FIG. 6 illustrates an isometric rear view of a floatation device configured with an optional storage box having an operating hollow tube-shaped radar reflector extending therefrom according to the present invention.

FIG. 7 illustrates a stationary hollow tube-shaped radar reflector configured with end caps and deployed from a floatation device according to the present invention.

FIG. 8 illustrates a stationary flat rectangular-shaped radar reflector deployed from a floatation device according to the present invention.

FIG. 9A illustrated a section view taken through a stationary flat rectangular-shaped radar reflector according to the present invention.

FIG. 9B illustrates a stationary flat rectangular-shaped radar reflector configured with a plurality of transverse stiffening members according to the present invention.

4

FIG. 9C illustrates a stationary flat rectangular-shaped radar reflector configured with two longitudinal stiffening members according to the present invention.

FIG. 9D illustrates an end or side view of a flat rectangular-shaped radar reflector rolled around a take-up rod.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

##### 10 Radar Target System

A target system 10, according to one embodiment of the present invention, is shown in FIGS. 1 and 2. The target system 10 includes a submerged manned or unmanned underwater vehicle, 15 programmed to move at one or more desired depths, velocities and patterns of movement. The underwater vehicle 15 may be remotely controlled from a base station, not shown, e.g. by radio communication from a surface marine vessel, aircraft, land installation, or submarine vessel. Alternately, the underwater vehicle 15 may operate autonomously according to predefined program sequences.

In a preferred embodiment, the underwater vehicle 15 tows an acoustic array 20. The acoustic array 20 is configured to emit an acoustic signature that simulates the sound made by a submarine. The acoustic signature is sensed by microphones, or the like, not shown, and a microphone signal is delivered to a sensor unit 25, which in the system 10 is an aircraft flying over a body of water. The water surface is shown by reference numeral 30. A sensor unit operator, inside the aircraft, may then listen to the microphone signal or digitally analyze the microphone signal to determine if the sound detected by the microphones could be a submerged submarine.

A tow line 35 extends between the acoustic array 20 and a positive buoyancy float device 40, which as shown in FIG. 1, is towed along the water surface 30 by the underwater vehicle 15. A radar reflective target 45 is attached to the float device 40 and towed along the water surface 30 by the float device 40. The radar reflective target 45 is configured to simulate the radar signature of a submarine mast. The RCS of the radar reflective target may be larger or smaller by lengthening or shortening the radar reflective target 45.

FIG. 2 depicts the same target system 10 but shows the float device 40 and radar reflective target 45 being towed submerged under the water surface 30 at a depth D. In this case the sensor unit 25 is searching for a submarine operating at a greater depth and the underwater vehicle 15 may be programmed to set various depths D to train operators to locate submerged submarines operating at different depths.

In contrast to conventional submarine mast simulators, the radar reflective target 45 of the present invention is towed horizontally behind the float device 40. In radar tests conducted by applicant, the horizontally disposed radar reflective target 45 is detectable by conventional radar systems and provides a low cost alternative to the more complex vertically extended radar reflective targets of the prior art.

The sensor unit 25 is configured with a radar system such as an x-band or short wave radar system capable of generating high resolution target images on a display screen. X-band radar systems are typically used in civil, military and government institutions for weather monitoring, air traffic control, maritime vessel traffic control, defense tracking, and vehicle speed detection for law enforcement. Generally, the radar system emits a radar beam and detects portions of the radar beam that are reflected from radar reflective objects. The reflected portions of the radar beam are detected by the radar system and generate electrical signals that may be processed to generate a radar blip depicted on a display screen. Alternately, objects detected by the radar system may provide to an

5

operator by other user interface feedback elements. Based on user interface feedback elements a radar operator may be able to decipher the object location, size, shape, distance, velocity and travel direction. A radar operator viewing the display screen or otherwise deciphering the radar feedback may then decide if the radar blip is characteristic of a submarine mast and take appropriate action.

Accordingly, the target system **10** generates an acoustic sound characteristic of a submerged submarine and provides a radar reflective target **45** having an RCS characteristic of a submarine mast. In addition, the underwater vehicle **15** may be programmed to tow the acoustic array **20** and radar reflective target **45** to simulate a submarine operation, e.g. moving at typical submarine velocities and depths to provide a realistic training environment for training aircraft sensor crews in submarine warfare techniques. Moreover, the improved target system **10** of the present invention allows a sensor crew to conduct both acoustic and radar training during a single aircraft pass-by. Of course, other submarine simulating elements may also be added to the target system **10**.

#### Radar Reflective Target

Referring to FIGS. 3A-3C, a preferred embodiment of the radar reflective target **45** comprises a hollow tube-shaped element **50** having a multilayered annular wall **55**. The annular wall **55** includes a positive buoyancy layer **60**. The positive buoyancy layer **60** preferably comprises a rectangular shaped layer of pliable plastic air cellular cushioning material. The plastic air cellular cushioning material comprises a plastic substrate formed with regularly spaced apart protruding air-filled hemispheres ("bubbles") that collectively provide positive buoyancy in water. One example of a commercially available material is BUBBLE WRAP™ sold by the Sealed Air Corporation of Elmwood Park N.J., USA. Preferably the positive buoyancy layer **60** has a thickness ranging from about 2-20 mm, but other thicknesses are usable. Alternately, the positive buoyancy layer **60** may comprise a pliable layer of other positive buoyancy plastic materials or composites.

The annular wall **55** further includes an externally facing radar reflective layer **65**. The radar reflective layer **65** preferably comprises a rectangular shaped layer of a pliable radar reflective foil such as a metal or metalized foil. An aluminum foil having a thickness in the range of 0.5-2.5 mm is particularly suitable. In the present example, the aluminum foil layer **65** is sized to match the size and shape of the positive buoyancy layer **60** and is adhesively bonded thereto over an entire surface of the layer **60**. To facilitate bonding, the aluminum foil layer **65** may be manufactured with one side of the layer being coated with an adhesive layer that is covered by a peel off protective sheet. The peel off sheet may then be removed just prior to contacting the radar reflective layer with a surface of the layer **60** and pressed on to ensure contact over the entire surface area.

In addition to the externally facing radar reflective layer **65**, the annular wall may further comprise a second opposing internally facing radar reflective layer **75** having substantially the same characteristics and being similarly formed and attached to an opposing surface of the positive buoyancy layer **60** as the first radar reflective layer **65**. The second radar reflective layer **75** may further increase the radar visibility of the annular wall **55**.

In an alternative embodiment, the radar reflective layers **65** and **75** may be sprayed, painted or otherwise deposited onto surfaces of the positive buoyancy layer **60**. In one example, the radar reflective layers **65** and **75** may comprise a polyester or nylon film that is aluminized by evaporating a thin film of metal onto it. Such films reflect up to 99% of light, including much of the infrared spectrum and radar wavelengths.

6

The hollow tube-shaped element **50** is formed into a tube shape along a longitudinal axis **76** by rolling the pliable composite rectangular sheet about the longitudinal axis and contacting opposing longitudinal edges as shown by the seam **80** in FIG. 3C. The seam **80** is taped along its longitudinal length by a tape layer **85** to hold the tube shape. The hollow tube element **50** is thereby formed with open ends to allow air to readily flow through the circular hollow cross-section **90** as the tube is towed along the water surface or to allow water to readily flow through the circular hollow cross-section **90** as the tube is towed submerged. The hollow cross-section **90** reduces drag resistance and allows the hollow cross-section to contain air while being towed along the surface and the air contained therein further increases the positive buoyancy of the target **45**.

The target **45** may also comprise one or more circular support members **95** disposed uniformly spaced apart along its longitudinal length for maintaining the tube shape. The support members **95** may comprise a one piece spirally formed wire member such as a weak compression spring, or the support members may comprise a plurality of spaced apart individual wire rings formed with circular cross-sections. In either configuration, the support members **95** may be formed from metal wire flat metal strips, from plastic material or any other suitable material.

In one embodiment, a spiral spring member is formed with an external diameter matching a desired tube external diameter and the pliable composite rectangular sheet is tightly wrapped around the spiral spring outside diameter and held in place by a contact force between the tube inside diameter and the spiral member. In other examples, a plurality of flat flexible strips are secured to the pliable composite rectangular sheet prior to forming the tube shape and the flat strips are formed into round hoops by the tube forming step. In any case, the support members **95** are secured to any surface of the pliable composite rectangular sheet or the formed tube either by mechanical or adhesive means.

In addition, the tube shaped target **45** also includes an attaching member **100** for attaching the target **45** to the float device **40** or to any tow line as may be required. The attaching member **100** may comprise an annular flange, a rod or other attaching element secured to the tube shaped target **45** at two or more points either by mechanical or adhesive attaching means. The attaching member **100** is configured to maintain the circular cross-section of a leading end of the hollow tube shaped element **50** to prevent the leading end from closing as water or air flows in.

According to a further aspect of the tube-shaped radar reflective target **45**, the hollow element **50** is collapsible in an accordion-like fashion to reduce its longitudinal length to a storage length. The collapsed tube **52** is shown in side view in FIG. 3B. As depicted therein the collapsed tube **52** may be secured in the collapsed condition by a pair of opposing holding element **97**, attached to the attaching member **100** and extend from the attaching member to the distal end of the collapsed tube to hold the tube in the collapsed state. The holding elements **97** may comprise an elasticized cord member configured with a hook shaped end **98** for capturing the collapsed tube distal end in the hook shaped end **98**. Alternately other mechanical hooking or latching members are usable.

Generally the tube-shaped radar reflective target **45** is constructed with a desired RCS, which in the present embodiment is approximately 0.5-1.0 square meters. To achieve the desired RCS, the external diameter of the tube-shaped element **50** of approximately 150 mm is selected, and this dictates a longitudinal length of the tube-shaped element **50** of approximately 3.3 meters to provide a 0.5 square meter RCS,

7

and a longitudinal length of 6.6 meters to provide a 1.0 square meter RCS. Alternately, the tube-shaped element **50** may be formed with other diameter and length combinations to provide any desired RCS.

Referring now to FIGS. 4A-4C, an assembled float device **40**, according to the present invention, is shown in side view in FIG. 4A. The float device **40** comprises a hydrodynamically shaped shell **105** extending along a central longitudinal axis **110**. The shell includes a forward facing conical nose portion **115** and a rearward facing conical tail portion **120** each attached to opposing ends of a cylindrical float section **125**. The float section **125** comprises a positive buoyancy material such as a formed polystyrene foam element but also comprise wood or any other suitable positive buoyancy material. The tail portion **120** is equipped with a plurality of stabilizer fins **130**. In a preferred embodiment, two orthogonal stabilizer fins **130** attach to the tail portion **120** and extend radially out from the longitudinal axis **110**. The general shape and size of an example stabilized fin **130** is shown in side view in FIG. 4C which show a fin with a transverse height of 279 mm, (11 inches).

The float device **40** also includes a tow line attaching element **135**, attached to the shell **105** on the submerged side of the longitudinal axis at a position along the longitudinal length that provides good towing performance. In addition, other attaching elements **140** are attached to stabilizer fins **130** as required for attaching one or more radar reflective targets **45** to the floatation device **40**. The targets **45** may be attached by securing the target attaching member **100** directly to the attaching elements **140** or a tow line may be extended between the target attaching member **100** and the float attaching members **140**.

As shown in side view in FIG. 4A and in rear view in FIG. 4B, the float device **40** may also include an optional box-shaped hollow storage area **145**. The storage area **145** is formed by four walls **150** joined at common edges and attached to each of the stabilizer fins **130**. The walls **150** may be square or rectangular and extend the longitudinal length of the float device **40** to provide the storage area **145**. The storage area **145** is used to store one or more reflective target elements **45** therein. The stored target elements **45** are clamped with the tube-shaped element in the collapsed state **52** by the holding elements **97** which are configured to fit the collapsed tube **52** within in the length of the hollow storage area **145**. As shown in FIG. 4B, collapsed tube-shaped elements **52** may be stored within the storage area **145** at orientations that are more radially distal from the longitudinal axis **110** than the external diameter of the cylindrical float section **125**. This allows air or water to flow through collapsed tube-shaped elements **52** as the float device **40** is towed. Accordingly, a single float device may carry two radar reflective targets of similar or differing target characteristics and deploy the targets one at a time to vary the target characteristics during different phases of target training.

As further illustrated by FIG. 4B, radar target elements may be attached to the float device **40** at any of four positions, labeled **1-4**. In position **1**, the target leading end is always submerged and therefore position **1** is suitable as a storage position. In either of positions **2** and **4**, the target leading end is substantially half submerged when the float device **40** is being towed along the water surface **30**, shown in FIG. 1. In the case when the float device longitudinal axis **110** floats substantially coplanar the water surface **30**, the leading ends of the targets in positions **2** and **3** intake about half water and half air. The positions **2** and **4** may be usable for either stored or deployed radar targets. In position **3**, the target leading end is always above the water surface **30** such that the leading end

8

takes in air. The intake air adds to the positive buoyancy of the target **45**. The position **3** is the preferred position for deploying a tube shaped element **50**.

Referring to FIG. 5 a float device **40** is shown in a rear isometric view to depict the optional storage area **145** shown with a collapsed tube-shaped element **52** stored therein. Referring to FIG. 6 a float device **40** is shown in a rear isometric view to depict the device with a fully extended tube shaped radar element **50** extending out from the storage area **145**. Air enters the tube-shaped radar element (**50**) and provides buoyancy. However, when the float device **40** is pulled down into the water by the underwater vehicle **15**, the tube-shaped radar element **50** fills with water thereby losing buoyancy resulting in the radar reflective target **45** sinking without the need for fins or additional power to assist in the sinking. Stationary Tube-Shaped Radar Reflective Target

Referring to FIG. 7, another embodiment of the present invention depicts a distressed person **180** floating in a body of water. The person **180** may be a crew member from a marine vessel or a downed aircraft. As shown, the person **180** is supported by a flotation device **185**. The flotation device **185** may comprise a life jacket, survival suit, life raft or any other flotation device as may be used by the person **180**. As further illustrated in FIG. 7, a substantially stationary tube-shaped radar reflective target **190** is attached to flotation device **185** by an attaching line **195** or other attaching device and deployed to float on the water surface proximate to the flotation device **185**.

One embodiment of the stationary tube-shaped radar reflective target **190** comprises an annular wall and an attaching member **100** that are substantially identical in construction to the annular wall **55** and attaching member **100** shown in FIG. 3A. However, the stationary tube-shaped radar reflective target **190** further includes ends caps **192** and **194** attached to the open ends of the annular wall **55** to water seal each end of the hollow cross-section **90**. The end caps **192** and **194** may comprise circular disks adhesively bonded or mechanically attached to each end of the annular wall **55** and provided to prevent the hollow cross-section **90** for filling with water. The end caps **192** and **194** may also include a valve passage usable to fill the tube with air or gas such as from a container of compressed gas, with a hand held air pump or by mouth blowing air into the tube. Like the hollow tube shaped element **50**, shown in FIG. 3A, the stationary tube-shaped radar reflective target **190** can be stored in the collapsed state, like the collapsed tube **52** of FIG. 3B, e.g. inside a bag or case attached to the flotation device **185**. Moreover, the stationary tube-shaped radar reflective target **190** may be automatically or manually deployed.

In an alternate embodiment, the stationary tube-shaped reflective target **190** may comprise a unitary single piece of seamless material forming an inflatable element. The inflatable element may comprise a continuous cylindrically formed outer skin having a circular cross-sections closed at each end by circular end cap section formed integrally therewith. The cylindrically formed outer skin and end caps surround a sealed hollow cavity. A fill valve, not shown, passes through the skin for delivering an air or gas into the sealed hollow cavity. The air or gas may be delivered through the valve with a container of compressed gas, by a hand held air pump or by mouth blowing air into the inflatable element.

The inflatable element may be formed from a metalized polyester or nylon material. The polyester material may comprise a biaxially oriented polyethylene terephthalate (boPET), know as MYLAR™ or MELINEX™. In either case, external surfaces of the inflatable element are aluminized by evaporating a thin film of metal thereon. Such a metalized

film reflects up to 99% of light, including much of the infrared spectrum and radar wavelengths. In this embodiment, neither the continuous cylindrically formed outer skin or the end caps are formed from a positive buoyancy layer but instead the positive buoyancy is provided by filling the sealed hollow cavity with gas or air. Like the hollow tube shaped element **50** of FIG. 3A, the inflatable element can be stored in a collapsed state, like the collapsed tube **52** of FIG. 3B, e.g. inside a bag or case attached to the floatation device **185**. Moreover, the inflatable element may be automatically or manually deployed.

Accordingly, the stationary tube-shaped radar reflective target **190** is filled with gas or air to cause it to float higher on the water surface to increase its radar visibility. In addition, the radar target **190** is beneficially configured with an easily detectable RCS such as an RCS of 2 or more square meters. Accordingly, the stationary tube-shaped radar reflective target **190** may be constructed with a diameter in the range of e.g. 300-600 mm and a longitudinal length e.g. 6-10 meters. Of course other diameter and length combinations as well as larger or smaller RCS dimensions are usable.

#### Stationary Flat Radar Reflective Target

A further embodiment of the present invention is illustrated in FIG. 8 which depicts a distressed person **180** floating in a body of water. The person **180** may be a crew member from a marine vessel or a downed aircraft. As shown, the person **180** is supported by a floatation device **185**. The floatation device **185** may comprise a life jacket, survival suit, life raft or any other floatation device as may be used by the distressed person **180**. As further illustrated in FIG. 8, a flat pliable radar reflective target **200** is attached to the floatation device **185** by an attaching line **195** and deployed to float on the water surface proximate to the floatation device **185** in a substantially stationary position.

Referring to FIGS. 9A-9D, a flat pliable radar reflective target **200** according to the present invention is shown in section view in FIG. 9A. The target **200** comprises a positive buoyancy layer **205** preferably comprising a rectangular shaped layer of pliable plastic air cellular cushioning material. The air cellular cushioning material is formed with regularly spaced apart protruding air-filled hemispheres ("bubbles") that collectively provide positive buoyancy in water. Preferably the positive buoyancy layer **205** has a thickness ranging from about 2-20 mm but other thicknesses are usable. One example of a commercially available air cellular material is BUBBLE WRAP™ sold by the Sealed Air Corporation, of Elmwood Park N.J., USA. Alternately, the positive buoyancy layer **60** may comprise any pliable layer of positive buoyancy material or composite.

The flat pliable radar reflective target **200** further includes a skyward facing radar reflective layer **210**. The radar reflective layer **210** preferable comprises a rectangular shaped layer of a pliable radar reflective foil such as a metal or metalized foil. An aluminum foil having a thickness in the range of 0.5-2.5 mm is particularly suitable. In the present example, the aluminum foil layer **210** is sized to match the size and shape of the positive buoyancy layer **205** and is adhesively bonded thereto over its entire surface. To facilitate bonding, the aluminum foil layer **210** may be manufactured with one side of the layer being coated with an adhesive layer that is covered by a peel off protective sheet. The peel off sheet may then be removed just prior to attaching the two sheets together.

In addition to the skyward facing radar reflective layer **210**, the flat pliable radar reflective target **210** may further comprise a second opposing seaward facing radar reflective layer **215** having substantially the same characteristics and being

similarly formed and attached to an opposing surface of the positive buoyancy layer **205** as the radar layer **210**. The second layer **215** may further increase the radar visibility of the target **200** and is especially advantageous when sea and wind conditions may flip the target **200**.

In alternate embodiments, the radar reflective layers **210** and **215** may be sprayed, painted or otherwise deposited onto surfaces of the positive buoyancy layer **205**. In one example, the radar reflective layers **210** and **215** may comprise a polyester or nylon film that is aluminized by evaporating a thin film of metal onto it. Such films reflect up to 99% of light, including much of the infrared spectrum and radar wavelengths.

As shown in FIGS. 9B and 9C, the flat pliable radar reflective target **200** may be configured with one or more longitudinal stiffening members **220** and or with one or more transverse stiffening members **225**. The stiffening members **220** and **225** may be attached to or integrally formed with the positive buoyancy layer **205** and may comprise a positive buoyancy material such as wood. The stiffening member **220** and **225** function to keep the flat pliable radar reflective target **200** deployed in a flat state to ensure that the full RCS of the target is always facing skyward.

The longitudinal stiffening members **220** comprise flexible members such as a flat metal or plastic springs or flexures, as might be used as the tape of a retractile tape measure. The flat longitudinal springs or flexures **220** are configured to remain stiff and straight when the target **200** is deployed in the water but the longitudinal springs or flexures **220** can be snapped to a second state that allows the springs **220** to be spooled around a rod in a storage state.

The transverse stiffening members **225** comprise a plurality of rigid members such as rods or flat strips of plastic, wood, metal or any other suitable material disposed spaced apart along the longitudinal length of the flat target **200**. Each of the stiffening members **220** and **225** may be attached to the flat target **200** by any adhesive or mechanical attaching means. In addition, the flat radar target **200** includes an attaching element **230** for securing the target **200** to the floatation device **185** by a two line or other attaching hook or the like.

The flat pliable radar reflective target **200** may be rolled for storage in a compact. One storage example is shown in FIG. 9D which depicts a take-up rod **235** usable for wrapping the longitudinal length of flat radar target **200** around in a compact roll. The take up rod **235** may comprise a first end transverse stiffening member **240** or a separate take-up rod may be attached to the floatation device **185**.

The flat pliable radar reflective target **200** may have any combination of dimensions that provides a desired RCS, e.g. 2 square meters. In one example a narrow transverse width of 150 mm is usable with a longitudinal length of 13.33 meters. In another example, a transverse width of 1 meter is usable with a longitudinal length of 2 meters. Alternately, the flat pliable radar reflective target **200** may be formed in other shapes, e.g. circular or triangular. In addition, the flat pliable radar reflective target **200** may be brightly colored for easy daylight visibility and or coated with a phosphor luminescence layer for easy night time visibility.

It will also be recognized by those skilled in the art that, while the invention has been described above in terms of preferred embodiments, it is not limited thereto. Various features and aspects of the above described invention may be used individually or jointly. Further, although the invention has been described in the context of its implementation in a particular environment, and for particular applications, e.g. as a radar training target, those skilled in the art will recognize that its usefulness is not limited thereto and that the present

## 11

invention can be beneficially utilized in any number of environments and implementations where it is desirable to simulate the radar cross section of a target object or to increase the radar cross section of a target object. Accordingly, the claims set forth below should be construed in view of the full breadth and spirit of the invention as disclosed herein.

What is claimed is:

1. A radar target system comprising:
  - a hollow radar reflective target formed with an open leading end and an open trailing end connected by a hollow body cross-section;
  - a float device having a longitudinal axis, a leading end, and a trailing end, formed by a cylindrical float section comprising a positive buoyancy material, a conical nose portion attached to the float section at the leading end, a conical tail portion attached to the float section at the trailing end and a plurality of stabilizer fins attached to the a conical tail portion and extending radially out from the longitudinal axis;
  - a tow line attaching element attached to the float device and positioned to provide a desired towing performance as the float device and radar reflective target are towed in water;
  - a first attaching member attached to the hollow radar reflective target at the open leading end and configured to maintain the body cross-section of the open leading end as the float device and radar reflective target are towed in water; and,
  - a second attaching member secured to the float device at the trailing end for attaching the hollow radar reflective target to the float device.
2. The radar target system of claim 1 further comprising:
  - an underwater vehicle deployed to tow the float device and radar reflective target in water; and,
  - a tow line extending between the underwater vehicle and the tow line attaching element.
3. The radar target system of claim 2 further comprising an acoustic array configured to emit an acoustic signature that simulates the sound made by a submarine and disposed between the underwater vehicle and the tow line.
4. The radar target system of claim 2 further composing a box-shaped hollow storage area attached to the trailing end to extend the longitudinal length of the float device for storing one or more radar targets in a collapsed state.
5. The radar target system of claim 4 further comprising holding elements for holding the one or more radar targets in the collapsed state.
6. The radar target system of claim 2 wherein the float device is configured to support the hollow radar reflective target open leading end above the water surface as the float device and radar reflective target are towed in water.
7. The radar target system of claim 1 wherein the hollow radar reflective target comprises a tube-shaped circular cross-section between said open leading end and said open trailing end.
8. A radar reflective target comprising:
  - a flat body comprising a layer of radar reflective material for reflecting a signal incident thereon, the radar reflective target having a first state in which the body is retracted for storage and a second state in which the body is extended for deployment and at least a portion of the layer of radar reflective material is substantially rigidly maintained along a first direction parallel to a longitudinal axis of the body and along a second direction orthogonal to the first direction;

## 12

- a second body separate from the flat body configured to stabilize the radar reflective target when the flat body is deployed in the second state; and
  - a line connecting the flat body to the second body, wherein the flat body is configured to have positive buoyancy such that at least a portion of the layer of radar reflective material is above the surface of the body of water when deployed in the second state.
9. The radar reflective target of claim 8 wherein the flat body is inflatable.
  10. The radar reflective target of claim 8 wherein the flat body comprises a plurality of protruding air-filled hemispheres disposed along the longitudinal axis of the flat body.
  11. The radar reflective target of claim 8 wherein the layer of radar reflective material is substantially flat.
  12. The radar reflective target of claim 8 wherein the layer of radar reflective material comprises an aluminized foil.
  13. The radar reflective target of claim 8 wherein the layer of radar reflective material comprises aluminized biaxially oriented polyethylene terephthalate.
  14. The radar reflective target of claim 8 further comprising:
    - at least one longitudinal member disposed along the longitudinal axis of the flat body to rigidly maintain the flat body along the first direction.
  15. The radar reflective target of claim 14 wherein the at least one longitudinal member is disposed along a first lateral side of the flat body; and the radar reflective target further comprises:
    - at least one second longitudinal member disposed along a second lateral side of the flat body opposing the first lateral side.
  16. The radar reflective target of claim 14 wherein the at least one longitudinal member comprises a flexible member able to be spooled around a rod.
  17. The radar reflective target of claim 8 further comprising:
    - a plurality of traverse members disposed along the flat body to rigidly maintain the flat body along the second direction.
  18. The radar reflective target of claim 8 wherein the second body is configured to hold a person.
  19. The radar reflective target of claim 18 wherein the second body includes a life jacket.
  20. The radar reflective target of claim 8, further comprising:
    - a storage unit for storing the flat body in the first state.
  21. The radar reflective target of claim 20, wherein the storage unit further stores the second body and the line in the first state.
  22. A radar reflective target comprising:
    - a hollow tube-shaped body forming an open end and comprising a layer of radar reflective material for reflecting a signal incident thereon, the radar reflective target having a first state in which the body is retracted for storage and a second state in which the body is extended for deployment;
    - a second body separate from the tube-shaped body configured to stabilize the radar reflective target when the tube-shaped body is extended in the second state; and
    - a line connecting the tube-shaped body to the second body, wherein the tube-shaped body is configured to have positive buoyancy such that at least a portion of the layer of radar reflective material is above the surface of the body of water when deployed in the second state.
  23. The radar reflective target of claim 22, wherein the tube-shaped body forms another open end.



## 13

24. The radar reflective target of claim 22 wherein the layer of radar reflective material is an externally facing first layer of radar reflective material, the tube-shaped body further comprising an internally facing second layer of radar reflective material opposing the first layer of radar reflective material.

25. The radar reflective target of claim 22 further comprising a plurality of support members disposed along a longitudinal axis of the tube-shaped body to maintain the shape of the tube-shaped body.

26. The radar reflective target of claim 22 further comprising a support member helically disposed along a longitudinal axis of the tube-shaped body.

27. The radar reflective target of claim 26 further comprising at least one holding element for holding the support mem-

## 14

ber in a collapsed state, wherein the radar reflective target is deployed upon release of the holding element.

28. The radar reflective target of claim 22 wherein the second body is configured to hold a person.

29. The radar reflective target of claim 28 wherein the second body includes a life jacket.

30. The radar reflective target of claim 22, further comprising:

a storage unit for storing the tube-shaped body in the first state.

31. The radar reflective target of claim 30, wherein the storage unit further stores the second body and the line in the first state.

\* \* \* \* \*