



US007854569B1

(12) **United States Patent**  
**Stenson et al.**

(10) **Patent No.:** **US 7,854,569 B1**  
(45) **Date of Patent:** **Dec. 21, 2010**

(54) **UNDERWATER UNMANNED VEHICLE RECOVERY SYSTEM AND METHOD**

(75) Inventors: **Ryan Michael Stenson**, Washington, DC (US); **Daniel J. Braun**, San Diego, CA (US); **Lonnie A. Hamme**, Jamul, CA (US); **Christopher D. Mailey**, Durham, NC (US)

(73) Assignee: **The United States of America as represented by the Secretary of the Navy**, Washington, DC (US)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **12/333,184**

(22) Filed: **Dec. 11, 2008**

(51) **Int. Cl.**  
**B63G 8/41** (2006.01)

(52) **U.S. Cl.** ..... **405/188**; 405/191; 114/322

(58) **Field of Classification Search** ..... 405/185, 405/188, 190, 191; 114/258, 259, 260, 313, 114/322, 330, 337

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,148,759 A \* 11/2000 Taylor, Jr. .... 114/312

6,390,012 B1 *	5/2002	Watt et al. ....	114/322
6,502,527 B1	1/2003	Danielson	
6,540,426 B2	4/2003	Cloyd et al.	
6,600,695 B1 *	7/2003	Nugent et al. ....	114/312
6,698,376 B2 *	3/2004	Delahousse et al. ....	114/322
6,779,475 B1	8/2004	Crane et al.	
7,000,560 B2	2/2006	Wingett	
7,350,475 B2	4/2008	Borgwarth et al.	
2008/0006197 A1 *	1/2008	Lambertus et al. ....	114/313

FOREIGN PATENT DOCUMENTS

DE	102004062124 B3 *	6/2006
FR	2832975	* 11/2001

\* cited by examiner


*Primary Examiner*—Frederick L Lagman

(74) *Attorney, Agent, or Firm*—Kyle Epele; J. Eric Anderson

(57) **ABSTRACT**

In various embodiments, an apparatus for use in the recovery of unmanned underwater vehicles includes a recovery vehicle configured to be coupled to a winch via a tether. The recovery vehicle includes one or more sensors for locating the unmanned underwater vehicle, a first mechanical linking device for coupling the recovery vehicle to the unmanned underwater vehicle, and a plurality of steering mechanisms for actively guiding the unmanned underwater vehicle in such a way as to allow the first mechanical linking device to capture the unmanned underwater vehicle by locking onto a second mechanical linking device of the unmanned underwater vehicle.

**3 Claims, 5 Drawing Sheets**

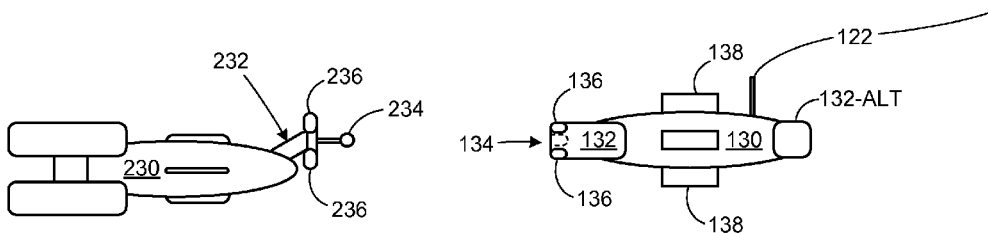

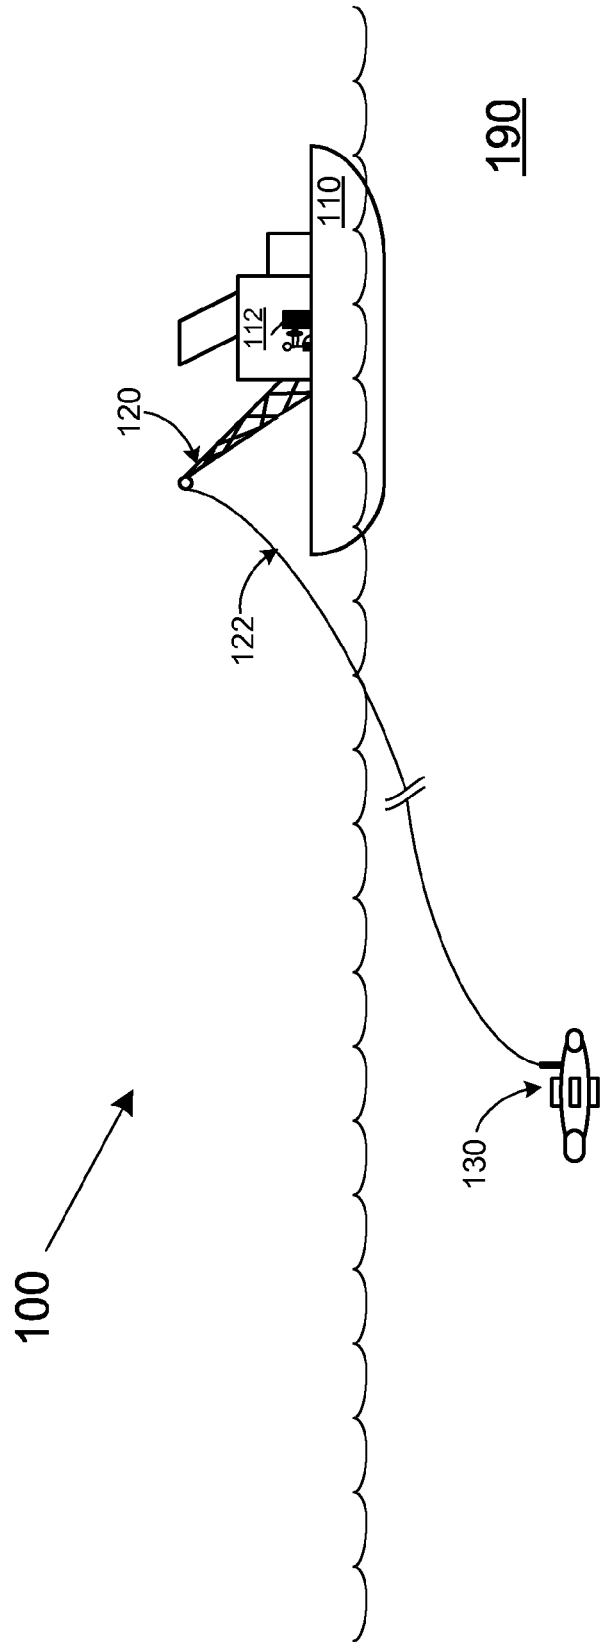


FIG. 1

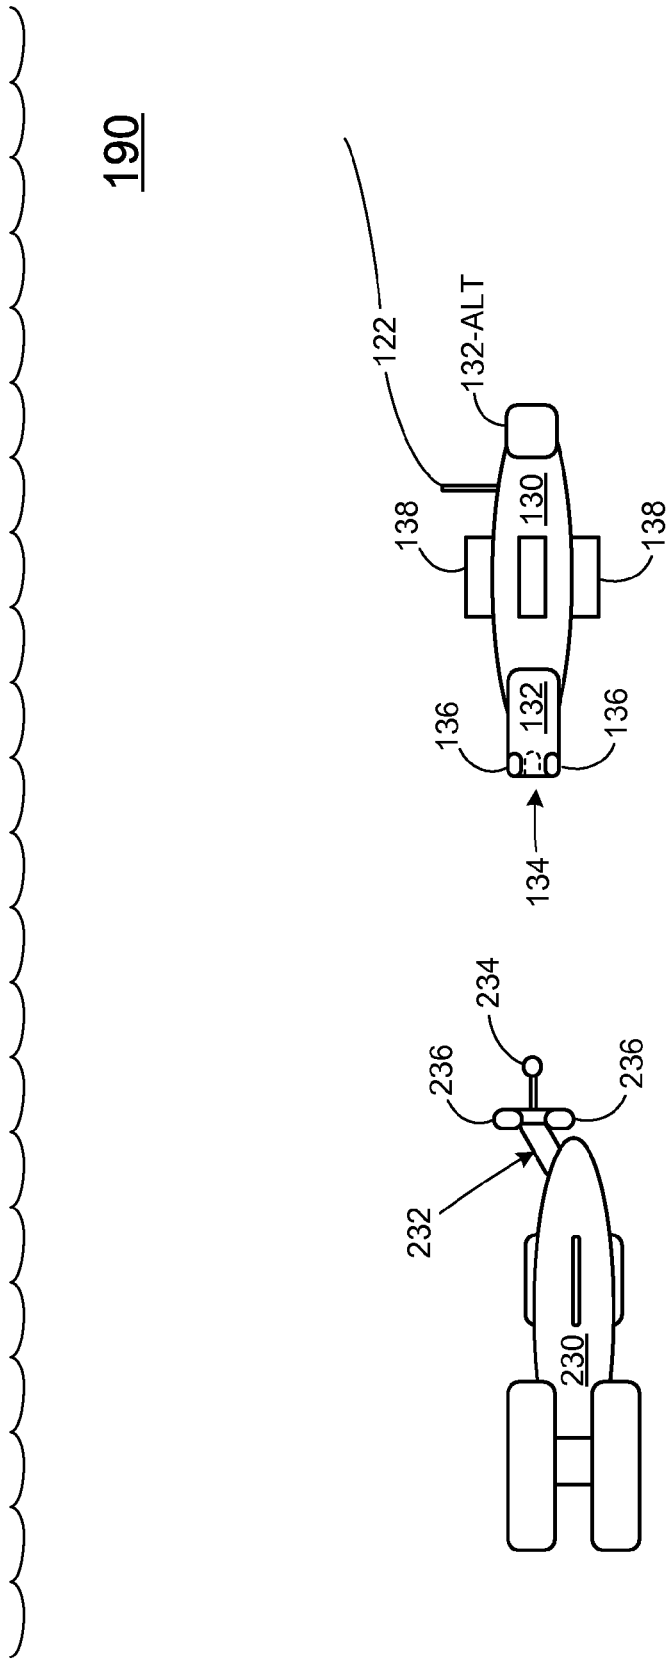


FIG. 2

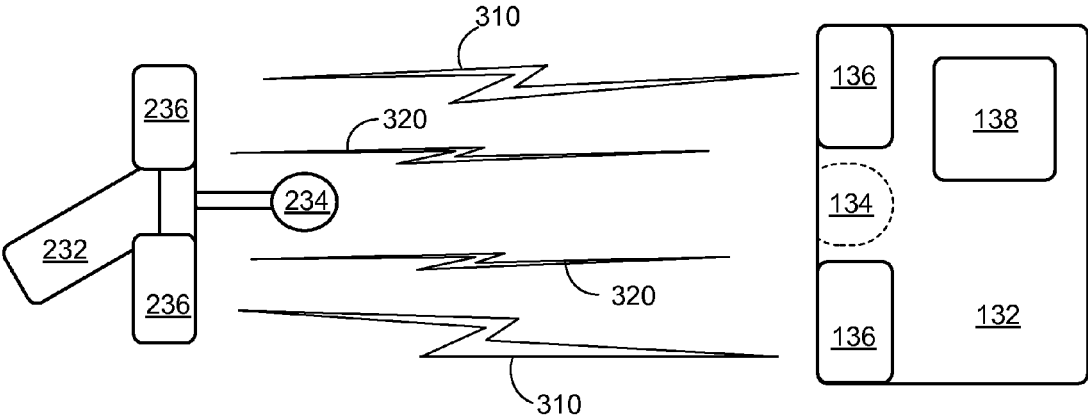


FIG. 3

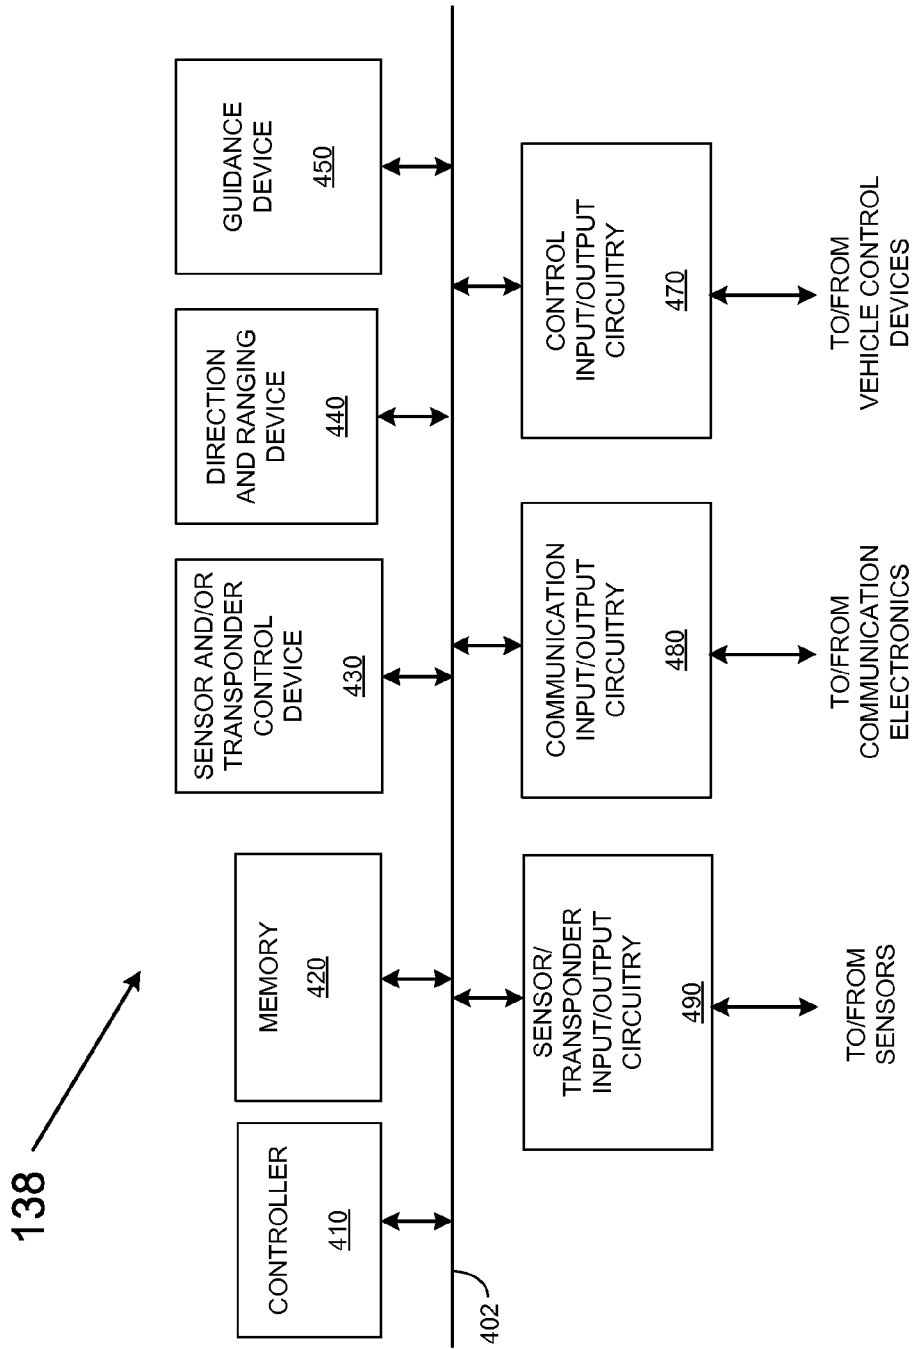


FIG. 4

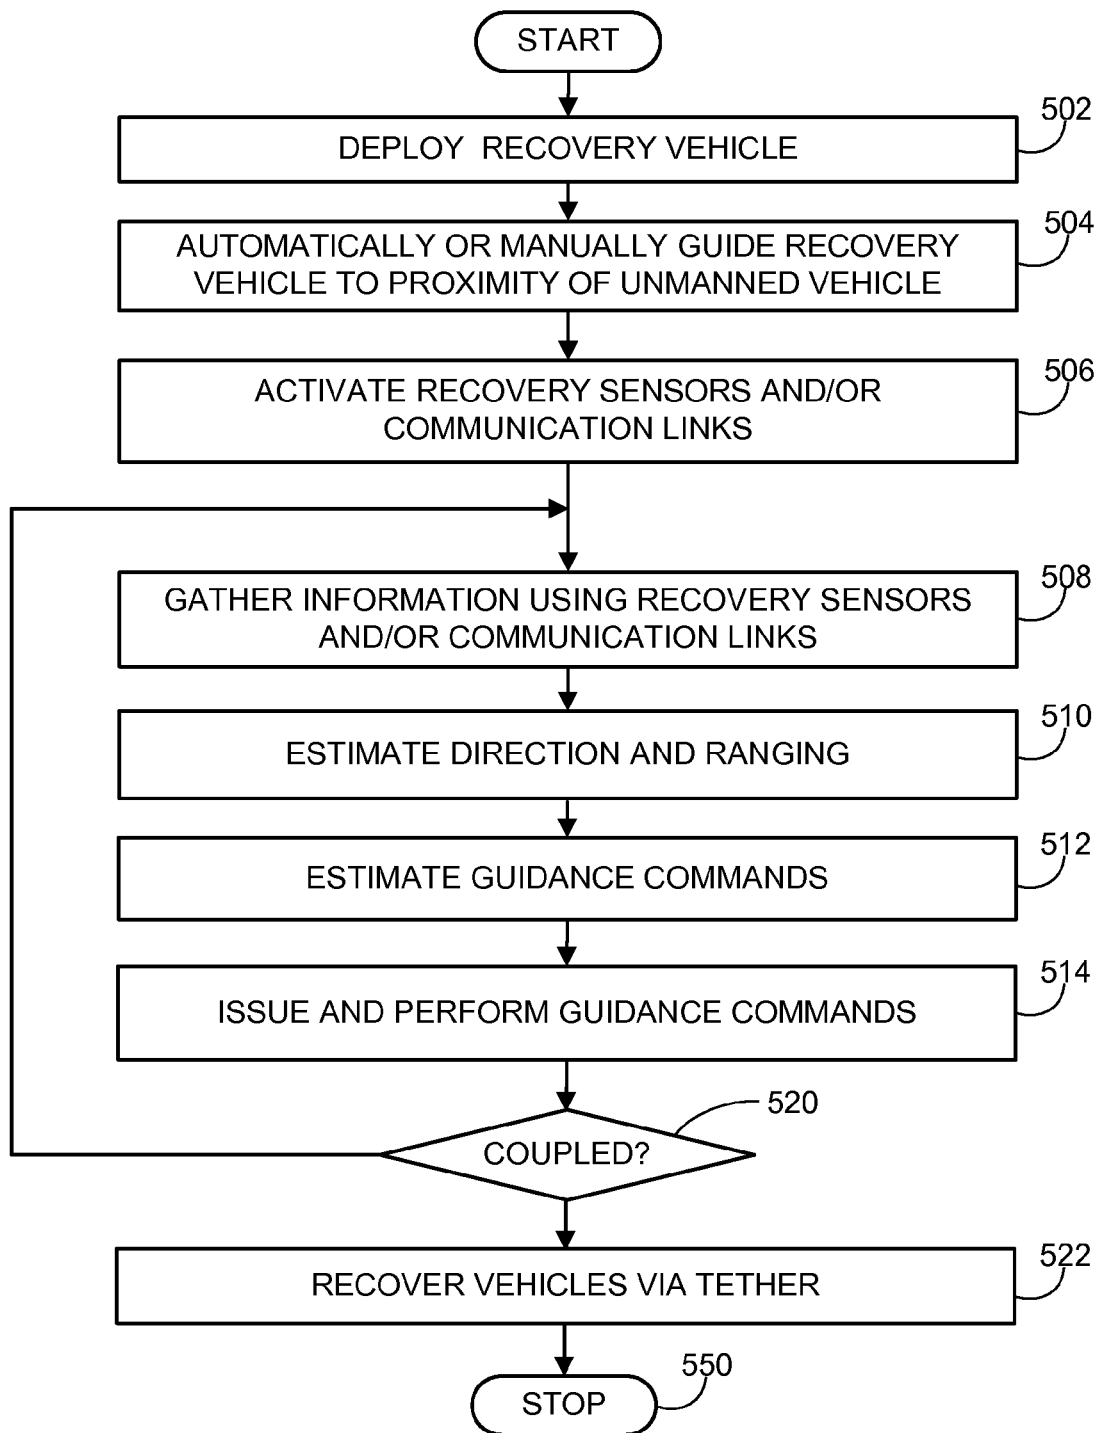


FIG. 5

## UNDERWATER UNMANNED VEHICLE RECOVERY SYSTEM AND METHOD

### FEDERALLY SPONSORED RESEARCH AND DEVELOPMENT

This invention (Navy Case No. 099145) was developed with funds from the United States Department of the Navy. Licensing inquiries may be directed to the Office of Research and Technical Applications, Space and Naval Warfare Systems Center, San Diego, Code 2112, San Diego, Calif., 92152; voice 619-553-2778; email T2@spawar.navy.mil.

### BACKGROUND

#### I. Field

This disclosure relates to systems and methods for the deployment and recovery of unmanned underwater vehicles.

#### II. Background

Unmanned underwater vehicles (UUVs) are forms of robots that travel underwater. Generally, UUVs include autonomous underwater vehicle (AUVs), which are devices that require no human control, and non-autonomous Remotely Operated underwater vehicles (ROVs), which are undersea vehicles that are controlled and powered from a remote location by an operator/pilot via an umbilical communications connection.

When UUVs are deployed, it becomes generally necessary to recover such devices. However, such recovery procedures can be extremely difficult, especially when the UUVs are autonomous devices having limited power or other resources (e.g., long-range underwater gliders), and no ready means to communicate with the outside world. Currently, launch and recovery operations of these assets are conducted with high risk to small boats, swimmer personnel and high-value equipment. Generally, a small boat or swimmer, in variable ocean conditions, must physically move to a UUV to attach a tow or lift line, or retrieve the vehicle by hand. This is extremely dangerous in high sea states.

With increasingly demanding requirements, the necessity to operate in higher sea states and from ships with differing freeboards, new recovery methods and devices for UUVs are desirable.

### SUMMARY

Various aspects and embodiments of the invention are described in further detail below.

In a first series of embodiments, an apparatus for use in the recovery of unmanned underwater vehicles includes a recovery vehicle configured to be coupled to a winch via a tether. The recovery vehicle includes one or more sensors for locating the unmanned underwater vehicle, a first mechanical linking device for coupling the recovery vehicle to the unmanned underwater vehicle, and a plurality of steering mechanisms for actively guiding the unmanned underwater vehicle in such a way as to allow the first mechanical linking device to capture the unmanned underwater vehicle by locking onto a second mechanical linking device of the unmanned underwater vehicle.

In another series of embodiments, an apparatus for use in the recovery of unmanned underwater vehicles includes a recovery vehicle configured to be coupled to a winch via a tether. The recovery vehicle includes locating means for locating the unmanned underwater vehicle, linking means for coupling the recovery vehicle to the unmanned underwater vehicle, and steering means for actively guiding the

unmanned underwater vehicle in such a way as to allow the linking means to capture the unmanned underwater vehicle by locking onto a second linking means of the unmanned underwater vehicle.

In another series of embodiments, a method for the recovery of unmanned underwater vehicles using a recovery vehicle coupled to a winch via a tether includes steering the recovery vehicle within an appreciably close range of the unmanned underwater vehicle using a remote steering system, a plurality of steering mechanisms of the recovery vehicle, and one or more first sensors of the recovery vehicle, placing the recovery vehicle into a capture mode, wherein when in the capture mode the recovery vehicle captures the unmanned underwater vehicle using a first mechanical linking device for coupling the recovery vehicle to the unmanned underwater vehicle and one or more sensors incorporated into the recovery vehicle configured to determine relative position of the unmanned underwater vehicle to the recovery vehicle, and retrieving both the recovery vehicle and unmanned underwater vehicle using the tether and winch.

### BRIEF DESCRIPTION OF THE DRAWINGS

The features and nature of the present disclosure will become more apparent from the detailed description set forth below when taken in conjunction with the accompanying drawings in which reference characters identify corresponding items.

FIG. 1 is an exemplary unmanned underwater vehicle recovery system.

FIG. 2 depicts an unmanned underwater vehicle together with the recovery vehicle of FIG. 1.

FIG. 3 depicts an exemplary coupling and sensor configuration for the unmanned underwater vehicle together and recovery vehicle of FIG. 2.

FIG. 4 is a processing system for the recovery vehicle of FIG. 3.

FIG. 5 is a flowchart outlining an exemplary process for capturing an unmanned underwater vehicle.

### DETAILED DESCRIPTION

The disclosed methods and systems below may be described generally, as well as in terms of specific examples and/or specific embodiments. For instances where references are made to detailed examples and/or embodiments, it should be appreciated that any of the underlying principles described are not to be limited to a single embodiment, but may be expanded for use with any of the other methods and systems described herein as will be understood by one of ordinary skill in the art unless otherwise stated specifically.

FIG. 1 is an exemplary unmanned underwater vehicle (UUV) recovery system **100**. As shown in FIG. 1, the UUV recovery system **100** includes a remote surface platform **110**, e.g., a ship, having a winch **120** and connected to an underwater Recovery Vehicle (RV) **130** via a tether **122**. The remote surface platform **110** floats on the surface of water **190**.

In operation, an operator at an operating center **112** on the remote surface platform **110** can deploy the RV **130** to search for a UUV, guiding the RV **130** through an area where a UUV is known or suspected to be. Note that the RV **130** may be guided and/or propelled using any number of mechanical devices, such as steerable water jets, steerable propellers, and one or more propellers with rudders. Also note that, in various other embodiments, the RV **130** may be propelled by virtue of being pulled by the remote surface platform **110** with steering accomplished using only a number of rudders/steering fins.

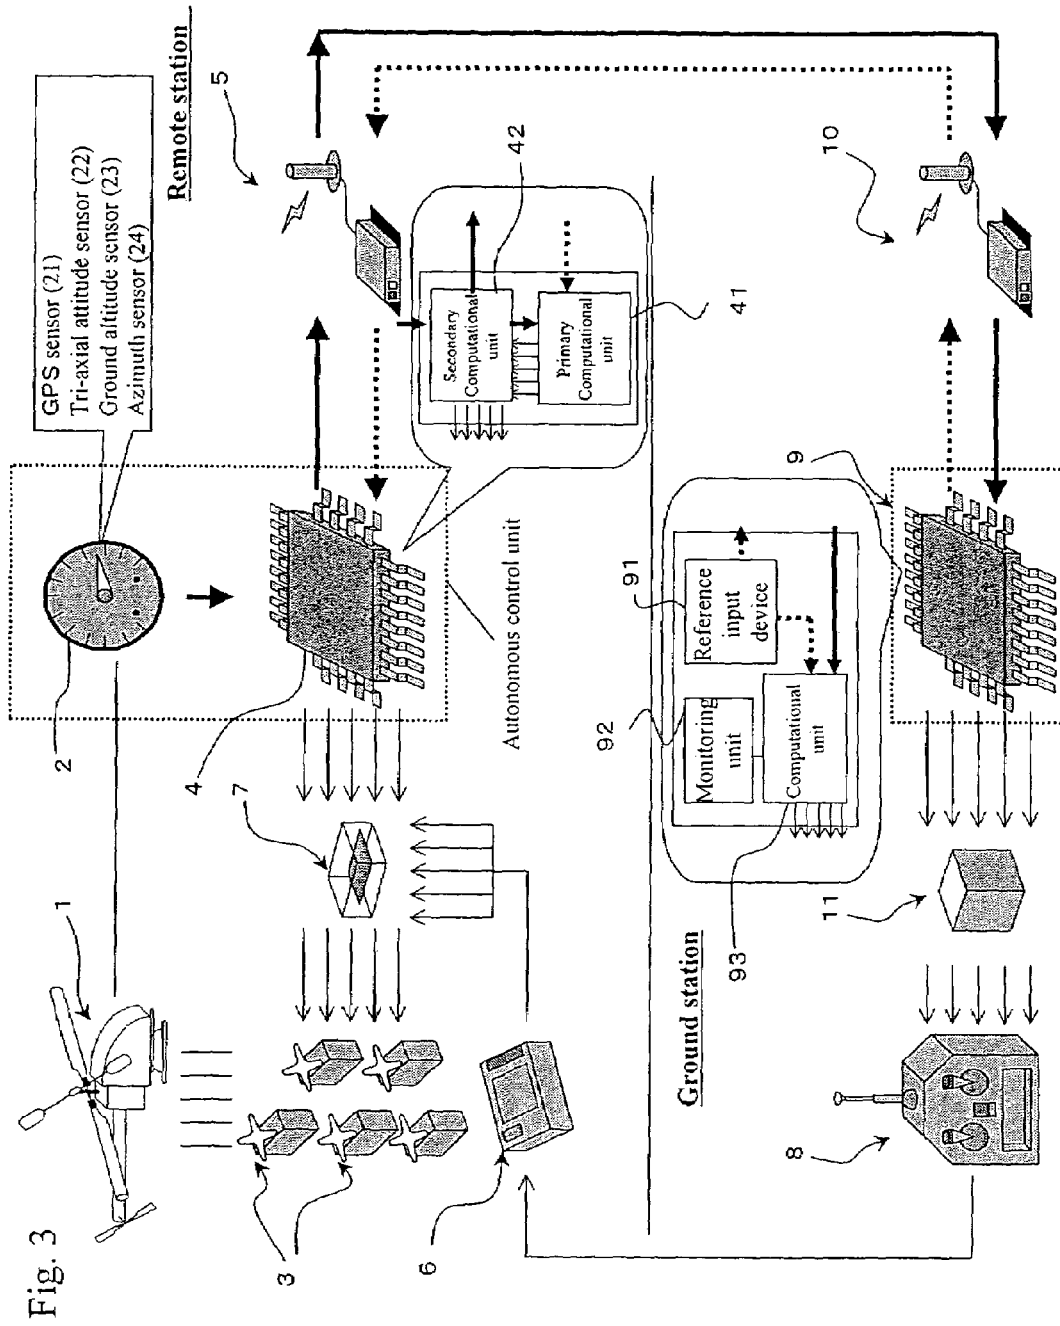


Fig. 3



It also should be appreciated that some of the above-listed components **430-450** can take the form of software/firmware routines residing in memory **420** and be capable of being executed by the controller **410**, or even software/firmware routines residing in separate memories in separate computing systems being executed by different controllers.

It also should be appreciated from the discussion above that the control module **138** can accommodate both an autonomous and manual operation for both a searching mode of operation and a capture mode of operation.

For manual modes of operation, the control module **138** may be limited in its functionality to, e.g., merely collecting sensor and/or transponder data via the sensor/transponder input/output circuitry **490**, and forwarding such data to a remote operator via the communication input/output circuitry **480**. Such tasking may optionally include the interim processing of sensor and transponder data in order to provide an operator with enhanced data (e.g., provide relative position data (rather than raw data) and/or enhanced or compressed video), may also be provided by the control module **138**. Other processing in manual mode may include accepting commands from the remote operator via the communication input/output circuitry **480**, and controlling various propellers, control fins, water jets, and so on, based on such remote operator commands.

For automatic modes of operation, i.e., where no remote human operator is used, there are again two operational modes: a searching mode of operation and a capture mode of operation.

During the searching mode, under control of the controller **410** various sensors and/or transponders may be activated and controlled by the sensor/transponder control device **430** via the sensor/transponder input/output circuitry **490**. Accordingly, the resultant sensor/transponder data collected by sensors incorporated into the RV **130** may be imported by the sensor/transponder input/output circuitry **490**, and stored in memory **420**. Additionally, remote sensor data, such as sonar data provided by a remote surface platform, may be imported via the communication input/output circuitry **480** under control of the controller **410**, and also stored in memory **420**. Thereafter, the ranging and detection device **440** may use the various sensor and/or transponder data to search for a UUV **230** and provide a relative position of the UUV **230** to the guidance device **450**. Accordingly, the guidance device **450** may determine the appropriate commands to give whatever steering and propulsion mechanisms that the RV **130** has, and issue such commands to such steering and propulsion mechanisms until the RV **130** comes within an appreciable proximity to the UUV **230**.

After the RV **130** is in proximity of the UUV **230**, the control module **138** may enter a capture mode in order to mechanically couple the RV **130** to the UUV **230** via a mechanical coupling system, such as the ball-and-socket joints discussed above. Upon entering the capture mode, the control module **138** may use the same set of sensors used for steering mode, or may employ other sensors more suitable for determining relative location in finer increments of angle and/or distance. For example, in a steering mode the control module **138** may use remotely provided sonar data, but switch to combination local vision system and laser-based scanning system to determine relative UUV **230** position once in capture mode.

Additionally, the controller **410** may optionally make direct communication with the UUV **230** using the communication input/output circuitry **480** and a short-range communication system incorporated into both the RV **130** and UUV **230**, such as a two-way EM radio or infrared laser-based

communication device. Again, as mentioned before, such a communication interface may be used to control the actions of the UUV **230** in order to provide a closed-loop control system to more precisely guide a mechanical coupling on the UUV **230** to a complementary mechanical coupling device on the RV **130**. Again, the sensor/transponder control device **430**, the ranging and detection device **440**, and the guidance device **450** may be used to control sensors, collect sensor data, determine relative position and determine the appropriate guidance commands to issue to either or both the RV **130** and UUV **230**.

FIG. **5** is a flowchart outlining an exemplary process for capturing an unmanned underwater vehicle. The process starts in step **502** where an RV **130** may be deployed to recover/capture a UUV **230**. Next, in step **504**, the RV **130** may be steered to an appreciable proximity of the UUV **230** using one or more first sensors under control of a human or (optionally) a computer-based operator. Again, as mentioned above, sensors deployed on a surface platform **110** or on the RV **130** may be used to facilitate guidance. Then, in step **506**, assuming that the RV **130** is in such an appreciable distance that local sensors and/or communication devices may be effectively used with the UUV **230**, the appropriate sensors/transponders and communication links may be activated.

Control continues to step **508**.

In step **508**, sensor/transponder data of sensors incorporated in the RV **130**, as well as remote sensor data, may be accumulated and stored. Additional data, such as telemetry data derived by the UUV **230** and sent over the appropriate communication link, may also be collected and stored. For example, while the RV **130** may use a local sonar and vision system to determine relative position of the RV **130** to the UUV **230**, relative velocity data may be derived using RV **130**-based velocity sensors and velocity sensors, e.g., gyroscopes, incorporated into the UUV **230** and sent over the appropriate communication link. Next, in step **510**, relative direction, (optional) velocity and ranging information may be derived, and in step **512** the appropriate guidance commands may be derived for either or both the RV **130** and UUV **230**. Control continues to step **514**.

In step **514**, the guidance commands derived in step **512** may be issued and performed by the RV **130** and/or UUV **230** so as to guide a mechanical coupling of the UUV **230** to a complementary coupling device on the RV **130**. Next, in step **520**, a determination is made as to whether the RV **130** and UUV **230** are securely coupled. If the RV **130** and UUV **230** are securely coupled, then control continues to step **522**; otherwise, control jumps back to step **508** where after steps **508-520** can be repeated as necessary.

In step **522**, the RV **130** and UUV **230** may be redeployed to a remote surface platform **110** via a winch **120** and tether **122** until the RV **130** and UUV **230** are secured to the surface platform **110**, and control continues to step **550** where the process stops.

In various embodiments where the above-described systems and/or methods are implemented using a programmable device, such as a computer-based system or programmable logic, it should be appreciated that the above-described systems and methods can be implemented using any of various known or later developed programming languages, such as "C", "C++", "FORTRAN", "Pascal", "VHDL" and the like.

Accordingly, various storage media, such as magnetic computer disks, optical disks, electronic memories and the like, can be prepared that can contain information that can direct a device, such as a computer, to implement the above-described systems and/or methods. Once an appropriate device has access to the information and programs contained

on the storage media, the storage media can provide the information and programs to the device, thus enabling the device to perform the above-described systems and/or methods.

For example, if a computer disk containing appropriate materials, such as a source file, an object file, an executable file or the like, were provided to a computer, the computer could receive the information, appropriately configure itself and perform the functions of the various systems and methods outlined in the diagrams and flowcharts above to implement the various functions. That is, the computer could receive various portions of information from the disk relating to different elements of the above-described systems and/or methods, implement the individual systems and/or methods and coordinate the functions of the individual systems and/or methods related to communications.

What has been described above includes examples of one or more embodiments. It is, of course, not possible to describe every conceivable combination of components or methodologies for purposes of describing the aforementioned embodiments, but one of ordinary skill in the art may recognize that many further combinations and permutations of various embodiments are possible. Accordingly, the described embodiments are intended to embrace all such alterations, modifications and variations that fall within the spirit and scope of the appended claims. Furthermore, to the extent that the term "includes" is used in either the detailed description or the claims, such term is intended to be inclusive in a manner similar to the term "comprising" as "comprising" is interpreted when employed as a transitional word in a claim.

What is claimed is:

1. A recovery apparatus comprising:

- a frame;
- a tether connection device coupled to the frame such that the frame may be tethered to a remote surface platform;
- one or more long-range and close-range location sensors coupled to the frame configured to locate and communicate with an untethered unmanned underwater vehicle (UUV);
- wherein the long-range and close-range location sensors are acoustic and non-acoustic sensors;
- a first mechanical linking device coupled to the frame, wherein the first mechanical linking device is configured to mechanically capture the UUV;
- a plurality of steering mechanisms coupled to the frame, wherein the plurality of steering mechanisms are configured to actively guide the frame through a body of water in such a way as to allow the first mechanical linking device to capture the UUV when underwater;
- wherein the apparatus is configured to be remotely controlled by an operator in order to position the frame within an appreciably close range of the UUV;

wherein when the frame is within the appreciably close range of the UUV, the apparatus is configured to then autonomously capture the UUV;

a short-range communication system configured to communicate with the UUV; and

wherein the apparatus is configured to control movement of the UUV via the short-range communication system.

2. An apparatus for use in the recovery of unmanned underwater vehicles, comprising:

- a recovery vehicle configured to be coupled to a winch via a tether, wherein the recovery vehicle includes,
  - locating means for locating an untethered unmanned underwater vehicle;
  - linking means for coupling the recovery vehicle to the untethered unmanned underwater vehicle;
  - one or more long-range and close-range location sensors coupled to the recovery vehicle wherein said sensors are configured to locate and communicate with the untethered unmanned underwater vehicle;
  - wherein the long-range and close-range location sensors are acoustic and non-acoustic sensors;
  - steering means for actively guiding the untethered unmanned underwater vehicle in such a way as to allow the linking means to capture the untethered unmanned underwater vehicle by locking onto a second linking means of the untethered unmanned underwater vehicle; and
  - wherein the recovery vehicle is configured to control movement of the unmanned underwater vehicle via a short-range communication means.

3. A method for the recovery of an untethered unmanned underwater vehicle (UUV) comprising:

- coupling a recovery vehicle to a winch via a tether;
- steering the recovery vehicle within an appreciably close range of the UUV using a remote steering system, a plurality of steering mechanisms of the recovery vehicle, and one or more first sensors of the recovery vehicle;
- placing the recovery vehicle into a capture mode, wherein when in the capture mode the recovery vehicle captures the untethered unmanned underwater vehicle using a first mechanical linking device for coupling the recovery vehicle to the untethered unmanned underwater vehicle, and one or more sensors incorporated into the recovery vehicle configured to determine relative position of the UUV to the recovery vehicle;
- retrieving both the recovery vehicle and UUV using the tether and winch; and
- wherein the step of capturing includes using a short-range communication system onboard the recovery vehicle to control movement of the UUV.

\* \* \* \* \*